

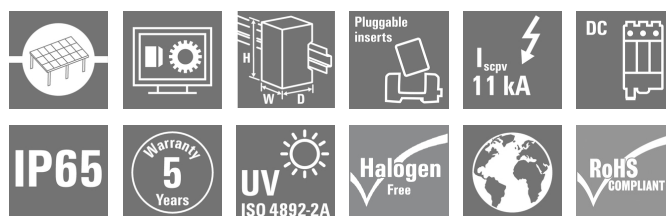
**PV 210S0F3CXXV000TAPA15PWW****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Standard portfolio for combiner boxes.****Protect and monitor strings in a solar park.**

Weidmüller has developed a full portfolio of standard PV DC combiner boxes for solar parks. These products intend to cover the most common used solutions for such purposes in an efficient and competitive manner. From 6 up to 32 inputs our Generation X offers a full range of products for monitored and non-monitored combiner boxes allowing our customer to benefit from Weidmüller's experience and commitment to quality. Gen X

**General ordering data**

Version	Photovoltaics, Assembled enclosure, Combiner Box, 1500 V, With fuse holder, Surge protection II, Cable gland, for wall mounting, Switch disconnect, Portrait, Current monitoring, Voltage monitoring, Temperature monitoring, Central Inverter
Order No.	<a href="#">8000101215</a>
Type	PV 210S0F3CXXV000TAPA15PWW
GTIN (EAN)	4099986025363
Qty.	1 pc(s).

## PV 210S0F3CXXV000TAPA15PWW

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	350 mm	Depth (inches)	13.78 inch
Height	1,056 mm	Height (inches)	41.575 inch
Width	852 mm	Width (inches)	33.543 inch
Net weight	37,959.066 g		

## Temperatures

Ambient temperature	-20°C to +35°C	Operating temperature	-20°C to +35°C
---------------------	----------------	-----------------------	----------------

## DC electrical properties

Earthing	Directly at the VPU	Rated voltage	1,500 V
Surge protection DC side	1500 V type II with remote contact	Switching capacity	400 A (DC21B 1500 V)

## DC inputs

Cartridge fuse	22 x 58 mm		
Connection DC input cable (+)	Screw connection		
Connection DC input cable (-)	Screw connection		
Connection type, DC input cable	Cable gland		
DC Input + & -	Wire connection	Type of connection	M16 Cable gland
	Cable entry	Number of cable entries	20
		Cable diameter, min.	5 mm
		Cable diameter, max.	10 mm
Functional earth connector	Cable entry	Number of cable entries	1
		Cable diameter, min.	6 mm
		Cable diameter, max.	12 mm
	Wire connection	Type of connection	M20 Cable gland
Fuse	30 A, 35 A, 40 A, 50 A, 60 A, 70 A, 75 A		
Fuse	Empty fuse holder		
Fuse type	Empty fuse holder		
Fuse-link standard	gPV (EN 60269-6)		
Fused poles of string	+/-		
Number of DC inputs	10		
Position of the fuses	positive and negative inputs		

## DC outputs

DC Output + & -	Wire connection	Type of connection	M40 Cable gland
		Wire cross-section, min.	150 mm <sup>2</sup>
		Wire cross-section, max.	400 mm <sup>2</sup>
DC output cable connection	M12 bolt and nut connection		
Load circuit breaker with auxiliary contact	No		
Number of DC outputs	2		

**PV 210S0F3CXXV000TAPA15PWW**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**
**DC string monitoring**

Current monitoring	Solar SMS	Monitoring function	Solar SMS, Output voltage, current, temperature
Supply	Self-powered	Temperature monitoring	Solar SMS
Voltage monitoring	Solar SMS		

**Housing**

Protection degree	IP65	Type of mounting	Wall mounting
-------------------	------	------------------	---------------

**Norms and standards**

Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0
-----------	-------------------------------------

**Guarantee**

Time interval	5 years
---------------	---------

**Electrical characteristics**

Rated DC voltage	1,500 V	Switching disconnecter capacity	IEC 60947-3
------------------	---------	---------------------------------	-------------

**Enclosure**

Connection type string	Internal terminal (with cable gland feed-through)	Cover	Hinged door
Enclosure attachment	Fixing lugs	Impact resistance	IK10 in accordance with IEC 62262
Insulating material	Polyester glass-fibre reinforced, Polycarbonate	Switch disconnecter execution	switch inside enclosure
Type of mounting	Wall mounting		

**General data**

Installation location	Protected outdoor area (>1 km from sea)	Protection degree	IP65
Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0		

**Surge protection DC side**

Short-circuit current $I_{SCP}$	48 A	Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0
Surge protection DC side	1500 V type II with remote contact		

**Classifications**

ETIM 6.0	EC002928	ETIM 7.0	EC002928
ETIM 8.0	EC003857	ETIM 9.0	EC003857
ECLASS 9.0	22-57-92-03	ECLASS 9.1	22-57-02-90
ECLASS 10.0	22-57-02-90	ECLASS 11.0	22-57-02-92
ECLASS 12.0	22-57-02-92	ECLASS 13.0	22-57-02-92

**PV 210S0F3CXXV000TAPA15PWW****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	1d28ada4-1634-4382-8635-45f6353a6574

**Approvals**

Approvals



ROHS	Conform
------	---------

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">EU Declaration of Conformity Combiner Boxes monitored</a>
Engineering Data	<a href="#">Electrical Drawing</a> <a href="#">Thermal Report</a>
Technical Documentation	<a href="#">Mechanical Drawing</a>
User Documentation	<a href="#">User Manual PV DC Combiner Boxes</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

### PV 210S0F3CXXV000TAPA15PWW

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



# PV 210S0F3CXXV000TAPA15PWW

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Combiner Box Name Description

PV 2 24 S0 FX CXX VX OX TXPX 15 P F ES

**PV 1:** PV DC L0 Industrial  
**PV 2:** PV DC L1 Industrial  
**PV 3:** PV DC L2 Industrial

**Number of inputs (01-36)**

**S0:** Switch-disconnector

S0 → Switch-disconnector (SW)  
S1 → Switch-disconnector with remote disconnection (SW RD)  
S2 → Molded Case Circuit Breaker (MCCB)  
S3 → Molded switch-disconnector (SW M)  
S4 → Switch-disconnector with Contactor (SW K)  
S5 → No switch-disconnector needed (N/A)

**FX:** Fuses / Fuseholders position

F0 → Fuses Both Poles  
F1 → Only Positive Fuses  
F2 → Only Negative Fuses  
F3 → Only Fuse Holders  
F4 → Only Fuse holder in positive (+)  
F5 → Only Fuse holder in negative (-)  
FX → No Fuse holders needed (N/A)

**CXX:** CIL Fuses Type → C 10/15/16/20/25/30/40/50/55/60/63/80 - (Example C20)

**NXX:** NH Fuses Type → N 40/50/63/80/100/125/160/200/250/315/355/400 - (Example N40)

CXX → N/A, NXX → N/A

**VX:** SPD Type

V0 → SPD Class II / V1 → SPD Class I+II / V2 → SPD Class I  
VX → No SPD needed (N/A)

**OX:** Output type

O0 → No holder needed (N/A)  
O1 → Cable Gland  
O2 → M24  
O3 → M24  
O4 → M24  
O5 → M24

**Country / Whole World**

**Floating:** YES (F) / NO

**P:** Portrait

**L:** Landscape

**10:** 1000V

**15:** 1500V

**TX:** Monitoring Device

TX → No monitoring (N/A)  
T0 → TC 24V (24V or 1.3kV)  
T1 → TC 24V  
T2 → TC 24V  
T3 → TC 24V  
T4 → TC 24V  
T5 → TC 24V  
T6 → TC 24V  
T7 → TC 24V  
T8 → TC 24V  
T9 → TC 24V  
T10 → TC 24V  
T11 → TC 24V  
T12 → TC 24V  
T13 → TC 24V  
T14 → TC 24V  
T15 → TC 24V  
T16 → TC 24V  
T17 → TC 24V  
T18 → TC 24V  
T19 → TC 24V  
T20 → TC 24V  
T21 → TC 24V  
T22 → TC 24V  
T23 → TC 24V  
T24 → TC 24V  
T25 → TC 24V  
T26 → TC 24V  
T27 → TC 24V  
T28 → TC 24V  
T29 → TC 24V  
T30 → TC 24V  
T31 → TC 24V  
T32 → TC 24V  
T33 → TC 24V  
T34 → TC 24V  
T35 → TC 24V  
T36 → TC 24V  
T37 → TC 24V  
T38 → TC 24V  
T39 → TC 24V  
T40 → TC 24V  
T41 → TC 24V  
T42 → TC 24V  
T43 → TC 24V  
T44 → TC 24V  
T45 → TC 24V  
T46 → TC 24V  
T47 → TC 24V  
T48 → TC 24V  
T49 → TC 24V  
T50 → TC 24V  
T51 → TC 24V  
T52 → TC 24V  
T53 → TC 24V  
T54 → TC 24V  
T55 → TC 24V  
T56 → TC 24V  
T57 → TC 24V  
T58 → TC 24V  
T59 → TC 24V  
T60 → TC 24V  
T61 → TC 24V  
T62 → TC 24V  
T63 → TC 24V  
T64 → TC 24V  
T65 → TC 24V  
T66 → TC 24V  
T67 → TC 24V  
T68 → TC 24V  
T69 → TC 24V  
T70 → TC 24V  
T71 → TC 24V  
T72 → TC 24V  
T73 → TC 24V  
T74 → TC 24V  
T75 → TC 24V  
T76 → TC 24V  
T77 → TC 24V  
T78 → TC 24V  
T79 → TC 24V  
T80 → TC 24V  
T81 → TC 24V  
T82 → TC 24V  
T83 → TC 24V  
T84 → TC 24V  
T85 → TC 24V  
T86 → TC 24V  
T87 → TC 24V  
T88 → TC 24V  
T89 → TC 24V  
T90 → TC 24V  
T91 → TC 24V  
T92 → TC 24V  
T93 → TC 24V  
T94 → TC 24V  
T95 → TC 24V  
T96 → TC 24V  
T97 → TC 24V  
T98 → TC 24V  
T99 → TC 24V

**PX:** Power Supply for (TX)

PX → No Power Supply Needed (N/A)  
P0 → Self-Powered (SEI)  
P1 → External Power Supply (PS ACDC)  
P2 → Self-Powered (SEI)

