

## WAS6 TTA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Circuit symbol

WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module.

These exceptional characteristics and outstanding configurability combine to make the TTA truly unique.

The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ...70 °C

The CBX200 USB interface is used to connect to the PC. The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

### General ordering data

Version	Input : universal U, I, R,9, Output : I/U universal, 2 x relays
Order No.	<a href="#">8939670000</a>
Type	WAS6 TTA
GTIN (EAN)	4032248721078
Qty.	1 pc(s).
Delivery status	<b>This article will no longer be available in the future.</b>
Available until	2023-10-22
Alternative product	<a href="#">1481970000</a>

## WAS6 TTA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	112.4 mm	Depth (inches)	4.425 inch
Width	45 mm	Width (inches)	1.772 inch
Length	100 mm	Length (inches)	3.937 inch
Net weight	256.1 g		

## Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	0 °C...70 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	5...95 %, no condensation

## Probability of failure

SIL in compliance with IEC 61508	None	MTTF	138 a
----------------------------------	------	------	-------

## Input

Input current	-20...+50 mA (min. interval 0.4 mA)	Input frequency	adjustable, 2 Hz...100 kHz
Input voltage	-200...500 mV (min. 4 mV span), -20...50 V DC (min. 0.5 V span)	Number of inputs	1
Potentiometer	10...50 Ω, 50...100 Ω, 100...200 Ω, 200...400 Ω, 400...800 Ω, 800 Ω...2 kΩ, 2...6.5 kΩ, 6.5...100 Ω	Resistance	10 Ω...5 kΩ
Sensor	Thermocouples: B, E, J, K, L, N, R, S, T (IEC 60584), PT100, PT1000, (EN 60571) Ni100, Ni1000, (JIS1604), Cu10, Cu25, Cu50, Cu100 (DIN 43760) 2-/3-/4-wire	Sensor supply	24 V DC / 22 mA
Temperature input range	Configurable, B: +100...+1820 °C, E: -270...+1000 °C, J: -270...+1200 °C, K: -150...+1372 °C, L: +100...+900 °C, N: -180...+1300 °C, R: -50...+1768 °C, S: -50...+1768 °C, T: -270...+400 °C, U: -200...+600 °C, User defined		

## Output

Load impedance current	≤ 600 Ω, @ max 23mA
------------------------	---------------------

## WAS6 TTA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Output (digital)

Alarm function	Top and bottom limit values, window range, Over-temperature, Alarm mode: delay, switch on or switch on/off, Holding function can be activated, Delayed 0...4200 s	Continuous current	2 A
Max. switching voltage, AC	0 V	Number of digital outputs	2
Rated switching current	0.1 A	Type	2 x 1 CO contact (hard gold-plated), Process alarms (4x) with hysteresis, with alarm delay (configurable) 0...180 s

## Output (analogue)

Load resistance current	<700 $\Omega$	Load resistance voltage	> 10 k $\Omega$ @ 0...10 V / > 20 k $\Omega$ @ -10...+10 V
Number of analogue outputs	1	Output current	adjustable between 0 and 20 mA (min. span of 5 mA)
Output voltage	adjustable between -10...+10 V (min. span 2.5 V)	Signal output	direct or inverted
Transmit function	Linear, $x^{1/2}$ , $x^{3/2}$ , $x^{5/2}$ or user-defined curve (101 points)		

## General data

Accuracy	<0.1 % span (DC, RTD); 0.2 % span (or 1 °C) + CJ failure	Configuration	Using free Windows software, TTA Set Software, Requires configuration adapter 8978580000 CBX200 USB
Long-term drift	0	Power consumption	<3.5 W
Step response time	50 ms...1 sec (RTD, mV inputs), 110 ms...1 sec (V, mA inputs)	Temperature coefficient	<0.1 % / K (DC, RTD); <0.1 % FSR / K + CJ error 0.07 °C/K (thermocouples)
Voltage supply	18...264 V AC/DC		

## Insulation coordination

EMC standards	EN 55011, EN 61000-6	Impulse withstand voltage	6 kV
Insulation voltage	2.5 kV	Pollution severity	2
Rated voltage	300 V	Surge voltage category	III

## Connection data

Type of connection	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.5 Nm
Clamping range, rated connection	2.5 mm <sup>2</sup>	Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>		

## WAS6 TTA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ETIM 9.0	EC002653
ECLASS 9.0	27-21-01-20	ECLASS 9.1	27-21-01-20
ECLASS 10.0	27-21-01-20	ECLASS 11.0	27-21-01-20
ECLASS 12.0	27-21-01-20	ECLASS 13.0	27-21-01-20

## Tender specification sheets

Long specification	Short specification	<b>Universal measurement isolating converters and trip amplifiers; can be configured with PC Universal measurement isolating converters and trip amplifiers in 45 mm width with external supply for voltage and sensors, for transmitting and isolating analogue DC current -20 to 50 mA, voltages -200 to 500 mV/ -20 to 50 V, 2-/3-/4-wire RTD, resistors, thermocouples according to IEC 584 and frequencies up to 100 kHz( 2- / 3-wire sensors).</b> <b>Two switching outputs (CO contact) for alarms, analogue DC voltages (-10 to +10 V) and current outputs (0 to 20 mA) are available on the output side.</b> <b>The component can be configured with a PC using the proprietary T-TA-Set software.</b>
--------------------	---------------------	---

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol 119-47-1
SCIP	f8333314-0c66-4444-aa47-78252861a7fb

## WAS6 TTA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Important note

#### Product information

WAS/WAZ6 TTA is a universal signal converter and trip amplifier that can be configured on the PC. Combines the functions of isolation, transmission, linearisation and trip amplification in a single module. These exceptional characteristics and outstanding configurability combine to make the TTA truly unique. The TTA functions with stability and precision under a wide range of voltages and ambient temperatures. It is compatible with all standard sensor types.

- Universal input signals: temperature signals such as resistance thermometer, thermocouple, potentiometer, frequency transmitter, DC voltage signals and current signals
- Loop-powered or passive input
- Wide-range power supply: 18 – 264 V AC/DC
- User-defined linearization
- Inputs and outputs can be configured on PC
- Combined analogue and relay output
- Ambient temperature range: -40 °C ... 70 °C

The CBX200 USB interface is used to connect to the PC.

The WAS/WAZ6 TTA is also offered as an option with ATEX Zone 2 and UL C1D2 approvals.

### Approvals

#### Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E141197

### Downloads


Approval/Certificate/Document of Conformity	<a href="#">Application notes – ATEX certification</a> <a href="#">Application notes – DNV GL Certificate</a> <a href="#">Application notes – Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Software	<a href="#">Runtime Software – Install_TTASet_V107.zip</a>
User Documentation	<a href="#">Device description – Manual english, deutsch, france</a> <a href="#">Device description – Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

## WAS6 TTA

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Drawings

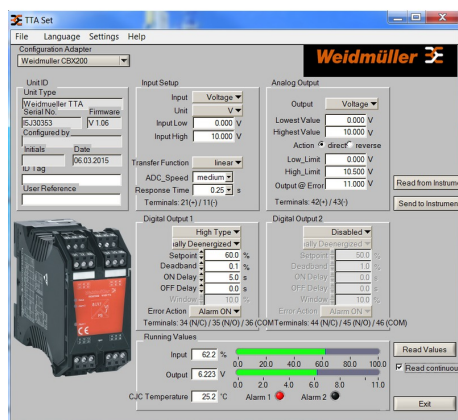

Screenshot of TTA Set Software




example of user defined transfer function  
for assigning customized output values




connection to your PC


## Converter

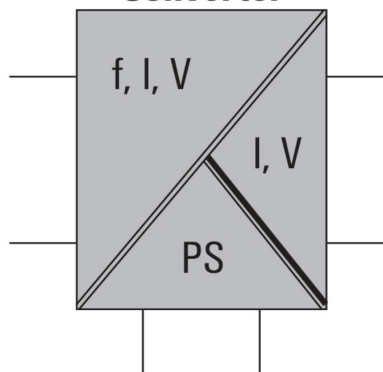

## Transmitter

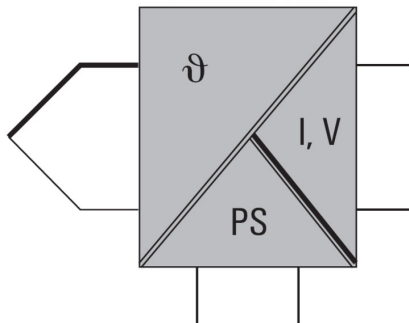

## Lineariser

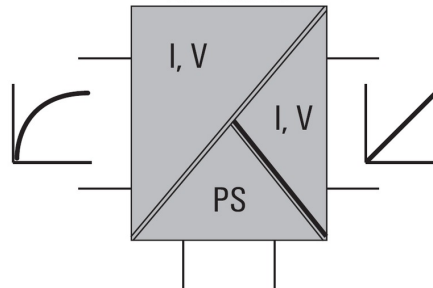

## WAS6 TTA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

### Configuration interfaces



### General ordering data

Type	CBX200 USB
Order No.	<a href="#">8978580000</a>
GTIN (EAN)	4032248813759
Qty.	1 pc(s).

**WAS6 TTA**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Drawings**
