

**PTS 4****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Power distribution using uncut cables with cross-sections from 1.5 to 6 mm<sup>2</sup>.

Power supply / T-branch tap via PUSH IN connection (0.5 to 10 mm<sup>2</sup>) and/or plug-in connection (0.5 to 4 mm<sup>2</sup>).

Coloured markings provide clear assignment of wires.

- Power supply
- Power distribution
- Power branching

**General ordering data**

Version	Field Power® plug-in connector, 3-phase AC, IP20, Polyamide, PUSH IN, Number of poles : 5
Order No.	<a href="#">1952120000</a>
Type	PTS 4
GTIN (EAN)	4032248632909
Qty.	10 pc(s).

## PTS 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	36.15 mm	Depth (inches)	1.423 inch
Height	27.3 mm	Height (inches)	1.075 inch
Width	55.45 mm	Width (inches)	2.183 inch
Net weight	34.3 g		

## Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...80 °C
---------------------	----------------	-----------------------	----------------

## Approbations

Certificate No. (cURus)	E60693	Institute (cURus)	CURUS
-------------------------	--------	-------------------	-------

## Clamping capacity, PUSH IN connection

Blade size, PUSH IN connection	3.0 x 0.5 mm	Clamping range, max. PUSH IN connection	4 mm <sup>2</sup>
Clamping range, min. PUSH IN connection	0.5 mm <sup>2</sup>	Cross-section for connected wire PUSH IN connection, solid, min.	0.5 mm <sup>2</sup>
Cross-section for connected wire, PUSH IN connection, solid, max.	4 mm <sup>2</sup>	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	4 mm <sup>2</sup>
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm <sup>2</sup>	Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	4 mm <sup>2</sup>
Cross-section for connected wire, flexible with wire-end ferrules, 12mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm <sup>2</sup>	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, max.	4 mm <sup>2</sup>
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/1, PUSH IN connection, min.	0.5 mm <sup>2</sup>	Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, max.	4 mm <sup>2</sup>
Cross-section for connected wire, flexible with wire-end ferrules, 8mm with plastic collar, DIN 46228/4, PUSH IN connection, min.	0.5 mm <sup>2</sup>	Cross-section for connected wire, flexible, PUSH IN connection, max.	4 mm <sup>2</sup>
Cross-section for connected wire, flexible, PUSH IN connection, min.	0.5 mm <sup>2</sup>	Finely-stranded flexible, max. PUSH IN connection	4 mm <sup>2</sup>
Finely-stranded flexible, min. PUSH IN connection	0.5 mm <sup>2</sup>	Stripping length, PUSH IN connection	12 mm
Wire connection cross section, stranded, PUSH IN connection, max.	4 mm <sup>2</sup>	Wire connection cross section, stranded, PUSH IN connection, min.	0.5 mm <sup>2</sup>

## PTS 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Clamping capacity

Connection data - plug-in connector	Wire connection method		PUSH IN
	Blade size of operating tool		3.0 x 0.5 mm
	Stripping length		12 mm
	Number of poles		5
	Conductor connection cross-section, solid, max.		4 mm <sup>2</sup>
	Conductor connection cross-section, solid, min.		0.5 mm <sup>2</sup>
	Conductor connection cross-section, stranded, max.		4 mm <sup>2</sup>
	Conductor connection cross-section, stranded, min.		0.5 mm <sup>2</sup>
	Conductor connection cross-section, finely stranded, max.		4 mm <sup>2</sup>
	Conductor connection cross-section, finely stranded, min.		0.5 mm <sup>2</sup>
	Conductor connection cross-section, finest stranded, max.		4 mm <sup>2</sup>
	Conductor connection cross-section, finest stranded, min.		0.5 mm <sup>2</sup>
	Conductor connection cross-section with wire end ferrule	Type of wire end ferrule	12 mm with plastic collar
		Standard	DIN 46228/1
		Cross-section, min.	0.5 mm <sup>2</sup>
		Cross-section, max.	4 mm <sup>2</sup>
		Type of wire end ferrule	12 mm with plastic collar
		Standard	DIN 46228/4
		Cross-section, min.	0.5 mm <sup>2</sup>
		Cross-section, max.	4 mm <sup>2</sup>
		Type of wire end ferrule	8 mm with plastic collar
		Standard	DIN 46228/1
		Cross-section, min.	0.5 mm <sup>2</sup>
		Cross-section, max.	4 mm <sup>2</sup>
		Type of wire end ferrule	8 mm with plastic collar
		Standard	DIN 46228/4
		Cross-section, min.	0.5 mm <sup>2</sup>
		Cross-section, max.	4 mm <sup>2</sup>
		Type of wire end ferrule	Twin wire-end ferrules
		Cross-section, min.	0.5 mm <sup>2</sup>
		Cross-section, max.	4 mm <sup>2</sup>

## General data

Insulating material	Polyamide	Silicone	No
Colour	black	Protection degree	IP20
UL 94 flammability rating	V-0	Type of mounting	Plugged
Can be coded	Yes, Coded on PE	Test point	2 mm
Voltage type	3-phase AC	Number of poles	5
Number of connections / pole	1	Wire connection method	PUSH IN
Conductor outlet direction	90°		

## PTS 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to IEC

Rated data acc. to IEC for plug-in connector

Voltage type	AC
Number of phases	3
Standard	IEC 60947-7-1, IEC 60947-7-2, IEC 61984
Rated voltage	690 V
Rated impulse withstand voltage	8 kV
Rated current (3 loaded poles)	32 A
Rated current (4 loaded poles)	25 A

## Rated data acc. to UL

Rated data acc. to UL for plug-in connector

Standard	UL 1059
Note	for use with UL-listed TC-ER cables
Conductor connection cross-section, AWG, max.	AWG 12
Conductor connection cross-section, AWG, min.	AWG 16
Rated voltage	600 V
Rated current	20 A

## Classifications

ETIM 6.0	EC002943	ETIM 7.0	EC002943
ETIM 8.0	EC002943	ETIM 9.0	EC002943
ECLASS 9.0	27-44-02-92	ECLASS 9.1	27-44-03-90
ECLASS 10.0	27-44-02-92	ECLASS 11.0	27-44-02-92
ECLASS 12.0	27-44-02-92	ECLASS 13.0	27-44-02-92

## Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E60693

## Downloads


Approval/Certificate/Document of Conformity	<a href="#">UL Certificate FieldPower® Box and accessories</a> <a href="#">UL Certificate FieldPower® terminals and plug-in connectors</a> <a href="#">Manufacturer's Declaration FieldPower® plug-in connectors and HQ adapters</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Manual FieldPower® PTS 4 and PTDS 4</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

## PTS 4

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

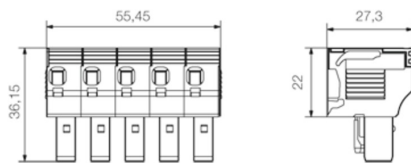

## PTS 4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	WS 12/6 MC NE WS	Version
Order No.	<a href="#">1609900000</a>	WS, Terminal marker, 12 x 6 mm, Pitch in mm (P): 6.00 Weidmueller,
GTIN (EAN)	4008190203467	Allen-Bradley, white
Qty.	600 pc(s).	

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

Type	SDS 0.5X3.0X80	Version
Order No.	<a href="#">2749330000</a>	Screwdriver, Blade width (B): 3 mm, Blade length: 80 mm, Blade
GTIN (EAN)	4050118895551	thickness (A): 0.5 mm
Qty.	1 pc(s).	

**PTS 4****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Tools**

Sheathing stripper for PVC cables

**General ordering data**

Type	AM 16	Version
Order No.	<a href="#">9204190000</a>	Tools, Sheathing strippers
GTIN (EAN)	4032248608133	
Qty.	1 pc(s).	
Type	AM 25	Version
Order No.	<a href="#">9001540000</a>	Tools, Sheathing strippers
GTIN (EAN)	4008190138271	
Qty.	1 pc(s).	

**Locking elements**

The plugs can be securely and easily fixed to the base terminal by using a locking element. The locking element avoids an unintentional disconnection of the plugs from the base terminal and ensures maximum safety.

**General ordering data**

Type	ZVR ZP2.5	Version
Order No.	<a href="#">1816130000</a>	Z-series, Locking clips, yellow, 3.9 mm
GTIN (EAN)	4032248370702	
Qty.	25 pc(s).	