

**SAIL-7/8G7/8G-5-10U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Dimensioned drawing**

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The 7/8" cables tend to be used for power supply applications.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

**General ordering data**

|            |  |
|------------|--|
| Version    | Sensor/actuator line, 7/8", Number of poles : 5 (4 + PE), 10 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| Order No.  | <a href="#">2519451000</a>   |
| Type       | SAIL-7/8G7/8G-5-10U  |
| GTIN (EAN) | 4050118533644  |
| Qty.       | 1 pc(s).   |

Creation date July 7, 2024 10:24:03 AM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

**SAIL-7/8G7/8G-5-10U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |       |
|------------|-------|
| Net weight | 600 g |
|------------|-------|

**Technical specifications for cable**

|                               |   |  |                        |
|-------------------------------|---|--|------------------------|
| Bending radius, min., moving  | 7.5 x cable diameter                    | Cable length                                   | 10 m                   |
| Colour coding                 | brown, white, blue, black, Green/yellow | Configurable cable length                      | No                     |
| Core cross-section            | 1.5 mm <sup>2</sup>                     | Halogen  | No                     |
| Insulation                    | TPM                                     | Irradiation crosslinked                        | No                     |
| Number of poles               | 5 (4 + PE)                              | Outer cladding in accordance with UL AWM style | 20234 (80 °C / 1000 V) |
| Outside diameter              | 8.7 mm ± 0.2 mm                         | PE function                                    | Yes                    |
| Resistant to welding beads    | No                                      | Sheath material                                | PUR                    |
| Sheathing colour              | black                                   | Shielded                                       | No                     |
| Suitable for cable carriers   | Yes                                     | Temperature range, moving                      | -20...80 °C            |
| Temperature range, stationary | -50...80 °C                             | Torsion resistance                             | 0 °/m                  |
| Welding spark resistance      | No                                      |  |                        |

**General technical data**

|                              |                |                        |                                  |
|------------------------------|----------------|------------------------|----------------------------------|
| Coding                       | none           | Connection thread      | 7/8"                             |
| Contact material             | CuZn           | Contact surface        | Au (Gold)                        |
| Housing main material        | PUR            | Insulation strength    | 10 <sup>8</sup> Ω                |
| LED                          | No             | Plugging cycles        | ≥ 100                            |
| Pollution severity           | 3              | Protection degree      | IP68, when screwed in            |
| Rated current                | 9 A            | Rated impulse voltage  | 2,500 V                          |
| Rated voltage                | 300 V          | Rated voltage (UL)     | 600 V                            |
| Temperature range of housing | -40 ... +85 °C | Threaded ring material | Diecast zinc                     |
| Tightening torque            | 7/8": 1.5 Nm   | Version                | pin, straight - socket, straight |
| jumpered                     | No             |                        |                                  |

**Electrical properties**

|                     |                   |               |       |
|---------------------|-------------------|---------------|-------|
| Insulation strength | 10 <sup>8</sup> Ω | Rated voltage | 300 V |
| Volume resistance   | ≤3 mΩ             |               |       |

**Plug, left**

|           |   |
|-----------|---|
| Plug left | IP68, male contact, straight, Plastic, unshielded |
|-----------|---|

**Plug, right**

|            |   |
|------------|---|
| Plug right | IP68, female contact, straight, Plastic, unshielded |
|------------|---|

## SAIL-7/8G7/8G-5-10U

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001855    | ETIM 7.0    | EC001855    |
| ETIM 8.0    | EC001855    | ETIM 9.0    | EC001855    |
| ECLASS 9.0  | 27-06-03-11 | ECLASS 9.1  | 27-06-03-11 |
| ECLASS 10.0 | 27-06-03-11 | ECLASS 11.0 | 27-06-03-11 |
| ECLASS 12.0 | 27-06-03-11 | ECLASS 13.0 | 27-06-03-11 |

## Environmental Product Compliance

|            |                                      |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1                       |
| SCIP       | ebf89fc8-a87f-4691-b87a-dfb9921774b4 |

## Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

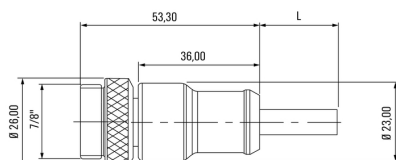
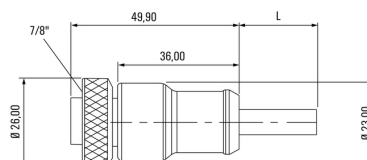
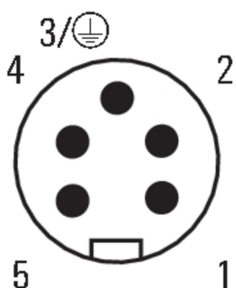
|                  |  |
|------------------|--|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |

**SAIL-7/8G7/8G-5-10U**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Drawings**
**Dimensioned drawing**

**Pole scheme**

**Pole scheme**

**Wiring diagram**
