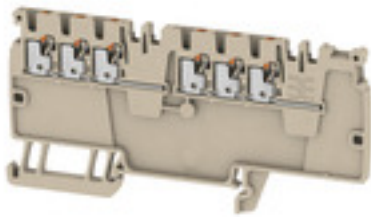


AAP13 1.5 LI-LI OR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

The unique modular concept can be tailored to every type of machine. The potential distribution terminal blocks AAP are successful thanks to their uniform design with two possible constructions – alternating or grouped. With the alternating design of the control voltage distribution, both potentials are located on only one terminal block.

General ordering data

| | |
|------------|--|
| Version | Modular distribution terminals, PUSH IN, 1.5 mm ² , 250 V, 16 A, orange |
| Order No. | 2623920000 |
| Type | AAP13 1.5 LI-LI OR |
| GTIN (EAN) | 4050118627442 |
| Qty. | 50 pc(s). |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|-----------|
| Depth | 47 mm | Depth (inches) | 1.85 inch |
| Depth including DIN rail | 48 mm | Height | 96 mm |
| Height (inches) | 3.78 inch | Width | 3.5 mm |
| Width (inches) | 0.138 inch | Net weight | 9.019 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C | | |

Material data

| | | | |
|---------------------------|-------|--------|--------|
| Material | Wemid | Colour | orange |
| UL 94 flammability rating | V-0 | | |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|---------------------|---------------------------------|---------------------|
| Certificate No. (ATEX) | TUEV17ATEX8030U | Certificate No. (IECEX) | IECEXTUR17.0015U |
| Max. voltage (ATEX) | 220 V | Current (ATEX) | 13 A |
| Wire cross section max. (ATEX) | 1.5 mm ² | Max. voltage (IECEX) | 220 V |
| Current (IECEX) | 13 A | Wire cross section max. (IECEX) | 1.5 mm ² |
| Marking EN 60079-7 | Ex ec II C Gc | Ex 2014/34/EU label | II 2 G D |

System specifications

| | | | |
|-----------------------------------|-----|------------------|---|
| End cover plate required | Yes | Number of levels | 1 |
| Levels cross-connected internally | No | | |

Additional technical data

| | | | |
|--------------------------|-----|---------------------|------|
| Explosion-tested version | Yes | Installation advice | Rail |
|--------------------------|-----|---------------------|------|

Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

Conductors for clamping (rated connection)

| | | | |
|--|--|------|----------------------|
| Clamping range, max. | 1.5 mm ² | | |
| Clamping range, min. | 0.14 mm ² | | |
| Connection cross-section, stranded, max. | 1.5 mm ² | | |
| Connection cross-section, stranded, min. | 0.5 mm ² | | |
| Gauge to IEC 60947-1 | A1 | | |
| Stripping length | 8 mm | | |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4 | Tube length | max. | 8 mm |
| | | min. | 6 mm |
| | Cross-section for conductor connection | min. | 0.14 mm ² |
| | | max. | 0.75 mm ² |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

| | | | |
|---|--|---------|----------------------|
| Tube length for wire-end ferrule without plastic collar DIN 46228/1 | Cross-section for conductor connection | nominal | 0.25 mm ² |
| | Tube length | min. | 5 mm |
| | Cross-section for conductor connection | min. | 0.5 mm ² |
| | | max. | 1 mm ² |
| | Tube length | nominal | 6 mm |
| | Cross-section for conductor connection | nominal | 1.5 mm ² |
| | Tube length | nominal | 10 mm |
| Type of connection | PUSH IN | | |
| Wire connection cross section AWG, max. | AWG 14 | | |
| Wire connection cross section AWG, min. | AWG 26 | | |
| Wire connection cross section, finely stranded, max. | 1.5 mm ² | | |
| Wire connection cross section, finely stranded, min. | 0.5 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 1.5 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm ² | | |
| Wire connection cross-section, solid core, max. | 1.5 mm ² | | |
| Wire connection cross-section, solid core, min. | 0.5 mm ² | | |

General

| | | | |
|---|--------|---|---------------|
| Installation advice | Rail | Standards | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 14 | Wire connection cross section AWG, min. | AWG 26 |

Rating data

| | | | |
|---|---------------------|--|---------|
| Rated cross-section | 1.5 mm ² | Rated voltage | 250 V |
| Rated voltage to adjoining terminal | 250 V | Rated DC voltage | 250 V |
| Rated current | 16 A | Current at maximum wires | 16 A |
| Standards | IEC 60947-7-1 | Volume resistance according to IEC 60947-7-x | 1.83 mΩ |
| Power loss in accordance with IEC 60947-7-x | 0.56 W | | |

UL rating data

| | | | |
|--|--------|--|--------|
| Certificate No. (cURus) | E60693 | Conductor size Factory wiring max. (cURus) | 14 AWG |
| Conductor size Factory wiring min. (cURus) | 26 AWG | Conductor size Field wiring max. (cURus) | 14 AWG |
| Conductor size Field wiring min. (cURus) | 26 AWG | Current size B (cURus) | 13 A |
| Current size C (cURus) | 13 A | Current size D (cURus) | 5 A |
| Voltage size B (cURus) | 150 V | Voltage size C (cURus) | 150 V |
| Voltage size D (cURus) | 300 V | | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ECLASS 9.0 | 27-14-11-20 | ECLASS 9.1 | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-01 |

Approvals

Approvals



| | |
|-------------------------|------------|
| UL File Number Search | UL Website |
| Certificate No. (cULus) | E60693 |

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | Attestation of Conformity IECEX Certificate ATEX Certificate DNVGL certificate CCC Ex Certificate UKCA declaration of conformity Confirmation of Standards EN 45545-2_2020-10 |
| Engineering Data | CAD data – STEP |
| User Documentation | NTI AAP13 StorageConditionsTerminalBlocks AAP Terminal Blocks for control voltage distribution User Manual AXC 1.5-16 |
| Catalogues | Catalogues in PDF-format |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

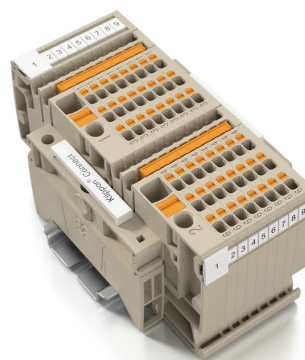

AAP13 1.5 LI-LI OR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****DEK 5/3.5****WS/ DEK**

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/3.5 MM WS | Version |
| Order No. | 2007100000 | Dekafix, Terminal marker, 5 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391992 | |
| Qty. | 1,000 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

WS 8/3.5



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 8/3.5 MM WS | Version |
| Order No. | 2007140000 | WS, Terminal marker, 8 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391893 | |
| Qty. | 1,000 pc(s). | |

A-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SCL/1 V0 GY | Version |
| Order No. | 2661290000 | A-series, End bracket |
| GTIN (EAN) | 4050118702170 | |
| Qty. | 20 pc(s). | |
| Type | AEB 35 SC/1 BK | Version |
| Order No. | 2475310000 | A-series, End bracket |
| GTIN (EAN) | 4050118487114 | |
| Qty. | 50 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 | Version |
| Order No. | 1991920000 | A-series, End bracket |
| GTIN (EAN) | 4050118376722 | |
| Qty. | 50 pc(s). | |
| Type | AEB 35 SCL/1 V0 BK | Version |
| Order No. | 2661300000 | A-series, End bracket |
| GTIN (EAN) | 4050118702187 | |
| Qty. | 20 pc(s). | |
| Type | AEB 35 SCL/1 V0 | Version |
| Order No. | 2661280000 | A-series, End bracket |
| GTIN (EAN) | 4050118702163 | |
| Qty. | 20 pc(s). | |

A-Series



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

General ordering data

| | | |
|------------|----------------------------|---------------------------|
| Type | APP 3 | Version |
| Order No. | 2489100000 | A-series, Partition plate |
| GTIN (EAN) | 4050118499315 | |
| Qty. | 50 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/3.5 PLUS MC SDR | Version |
| Order No. | 2007790000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118393347 | Weidmueller, To customer specification |
| Qty. | 320 pc(s). | |
| Type | DEK 5/3.5 MC SDR | Version |
| Order No. | 1767730000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248102532 | Weidmueller, To customer specification |
| Qty. | 100 pc(s). | |

A-Series



Uniform inspection and test taps, consistent cross-connections, efficient markers, and timesaving PUSH IN connection technology make the A-Series particularly future-proof. The innovative design with clearly delineated functional areas and coloured pushers ensures maximum connection and maintenance safety.

General ordering data

| | | |
|------------|----------------------------|---------------------|
| Type | AEP AP13 | Version |
| Order No. | 1990140000 | A-series, End plate |
| GTIN (EAN) | 4050118375152 | |
| Qty. | 20 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 10/3.5 PLUS MC SDR | Version |
| Order No. | 2007760000 | WS, Terminal marker, 10 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118393262 | Weidmueller, To customer specification |
| Qty. | 192 pc(s). | |

Digital current clamp devices



Digital current clamp devices and attachments and adapters are used for measuring AC and DC currents. The significant advantage of these devices is that you can make a measurement without breaking the flow of current.

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | ZUB MULTIMETER | Version |
| Order No. | 9205270000 | Multimeter |
| GTIN (EAN) | 4032248723522 | |
| Qty. | 1 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

1.5 mm²


1.5
mm²

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | ZQV 1.5N/9 BL | Version |
| Order No. | 1985660000 | Cross-connector (terminal), Plugged, Number of poles: 9, Pitch in mm |
| GTIN (EAN) | 4050118370478 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/50 RD | Version |
| Order No. | 1985820000 | Cross-connector (terminal), Plugged, Number of poles: 50, Pitch in mm |
| GTIN (EAN) | 4050118370270 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 5 pc(s). | |
| Type | ZQV 1.5N/5 BL | Version |
| Order No. | 1985590000 | Cross-connector (terminal), Plugged, Number of poles: 5, Pitch in mm |
| GTIN (EAN) | 4050118370430 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/3 | Version |
| Order No. | 1985480000 | Cross-connector (terminal), Plugged, Number of poles: 3, Pitch in mm |
| GTIN (EAN) | 4050118370096 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/3 RD | Version |
| Order No. | 1985670000 | Cross-connector (terminal), Plugged, Number of poles: 3, Pitch in mm |
| GTIN (EAN) | 4050118370348 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/7 | Version |
| Order No. | 1985520000 | Cross-connector (terminal), Plugged, Number of poles: 7, Pitch in mm |
| GTIN (EAN) | 4050118370195 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/10 RD | Version |
| Order No. | 1985800000 | Cross-connector (terminal), Plugged, Number of poles: 10, Pitch in mm |
| GTIN (EAN) | 4050118370393 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/4 RD | Version |
| Order No. | 1985690000 | Cross-connector (terminal), Plugged, Number of poles: 4, Pitch in mm |
| GTIN (EAN) | 4050118370515 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/9 RD | Version |
| Order No. | 1985790000 | Cross-connector (terminal), Plugged, Number of poles: 9, Pitch in mm |
| GTIN (EAN) | 4050118370386 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/6 RD | Version |
| Order No. | 1985730000 | Cross-connector (terminal), Plugged, Number of poles: 6, Pitch in mm |
| GTIN (EAN) | 4050118370454 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |

Creation date June 4, 2024 3:06:42 AM CEST

Catalogue status 01.06.2024 / We reserve the right to make technical changes.

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 1.5N/50 BL | Version |
| Order No. | 1985720000 | Cross-connector (terminal), Plugged, Number of poles: 50, Pitch in mm |
| GTIN (EAN) | 4050118370546 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 5 pc(s). | |
| Type | ZQV 1.5N/10 BL | Version |
| Order No. | 1985680000 | Cross-connector (terminal), Plugged, Number of poles: 10, Pitch in mm |
| GTIN (EAN) | 4050118370539 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/4 BL | Version |
| Order No. | 1985570000 | Cross-connector (terminal), Plugged, Number of poles: 4, Pitch in mm |
| GTIN (EAN) | 4050118370317 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/10 | Version |
| Order No. | 1985580000 | Cross-connector (terminal), Plugged, Number of poles: 10, Pitch in mm |
| GTIN (EAN) | 4050118370416 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/8 RD | Version |
| Order No. | 1985770000 | Cross-connector (terminal), Plugged, Number of poles: 8, Pitch in mm |
| GTIN (EAN) | 4050118370508 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/7 RD | Version |
| Order No. | 1985750000 | Cross-connector (terminal), Plugged, Number of poles: 7, Pitch in mm |
| GTIN (EAN) | 4050118370249 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/4 | Version |
| Order No. | 1985490000 | Cross-connector (terminal), Plugged, Number of poles: 4, Pitch in mm |
| GTIN (EAN) | 4050118370201 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/8 BL | Version |
| Order No. | 1985640000 | Cross-connector (terminal), Plugged, Number of poles: 8, Pitch in mm |
| GTIN (EAN) | 4050118370461 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/20 RD | Version |
| Order No. | 1985810000 | Cross-connector (terminal), Plugged, Number of poles: 20, Pitch in mm |
| GTIN (EAN) | 4050118370355 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 | Version |
| Order No. | 1985410000 | Cross-connector (terminal), Plugged, Number of poles: 2, Pitch in mm |
| GTIN (EAN) | 4050118369861 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/20 | Version |
| Order No. | 1985600000 | Cross-connector (terminal), Plugged, Number of poles: 20, Pitch in mm |
| GTIN (EAN) | 4050118370225 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/5 RD | Version |
| Order No. | 1985710000 | Cross-connector (terminal), Plugged, Number of poles: 5, Pitch in mm |
| GTIN (EAN) | 4050118370256 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/6 | Version |
| Order No. | 1985510000 | Cross-connector (terminal), Plugged, Number of poles: 6, Pitch in mm |
| GTIN (EAN) | 4050118370188 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |

Creation date June 4, 2024 3:06:42 AM CEST

Catalogue status 01.06.2024 / We reserve the right to make technical changes.

12

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 1.5N/7 BL | Version |
| Order No. | 1985630000 | Cross-connector (terminal), Plugged, Number of poles: 7, Pitch in mm |
| GTIN (EAN) | 4050118370522 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/3 BL | Version |
| Order No. | 1985550000 | Cross-connector (terminal), Plugged, Number of poles: 3, Pitch in mm |
| GTIN (EAN) | 4050118370485 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/8 | Version |
| Order No. | 1985540000 | Cross-connector (terminal), Plugged, Number of poles: 8, Pitch in mm |
| GTIN (EAN) | 4050118370218 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 BL | Version |
| Order No. | 1985530000 | Cross-connector (terminal), Plugged, Number of poles: 2, Pitch in mm |
| GTIN (EAN) | 4050118370423 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/5 | Version |
| Order No. | 1985500000 | Cross-connector (terminal), Plugged, Number of poles: 5, Pitch in mm |
| GTIN (EAN) | 4050118369991 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/20 BL | Version |
| Order No. | 1985700000 | Cross-connector (terminal), Plugged, Number of poles: 20, Pitch in mm |
| GTIN (EAN) | 4050118370331 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 RD | Version |
| Order No. | 1985650000 | Cross-connector (terminal), Plugged, Number of poles: 2, Pitch in mm |
| GTIN (EAN) | 4050118370324 | (P): 3.50, Insulated: Yes, 17.5 A, red |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/6 BL | Version |
| Order No. | 1985610000 | Cross-connector (terminal), Plugged, Number of poles: 6, Pitch in mm |
| GTIN (EAN) | 4050118370492 | (P): 3.50, Insulated: Yes, 17.5 A, blue |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/50 | Version |
| Order No. | 1985620000 | Cross-connector (terminal), Plugged, Number of poles: 50, Pitch in mm |
| GTIN (EAN) | 4050118370300 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 5 pc(s). | |
| Type | ZQV 1.5N/9 | Version |
| Order No. | 1985560000 | Cross-connector (terminal), Plugged, Number of poles: 9, Pitch in mm |
| GTIN (EAN) | 4050118370409 | (P): 3.50, Insulated: Yes, 17.5 A, orange |
| Qty. | 20 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/3.5 PLUS MC NE WS | Version |
| Order No. | 2003750000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118424430 | Weidmueller, white |
| Qty. | 1,600 pc(s). | |
| Type | DEK 5/3.5 MC NE GE | Version |
| Order No. | 1369480000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118171860 | Weidmueller, yellow |
| Qty. | 500 pc(s). | |
| Type | DEK 5/3.5 MC NE WS | Version |
| Order No. | 1755270000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248017348 | Weidmueller, white |
| Qty. | 500 pc(s). | |

AAP13 1.5 LI-LI OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank

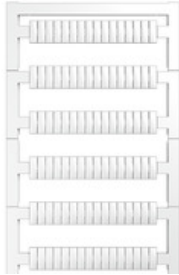

WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.


- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| Type | WS 10/3.5 PLUS MC NE WS | Version |
|------------|----------------------------|---|
| Order No. | 2003760000 | WS, Terminal marker, 10 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118424454 | Weidmueller, white |
| Qty. | 960 pc(s). | |

Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

General ordering data

| Type | SDS 0.4X2.0X60 | Version |
|------------|----------------------------|--|
| Order No. | 2749260000 | Screwdriver, Blade width (B): 2 mm, Blade length: 60 mm, Blade thickness (A): 0.4 mm |
| GTIN (EAN) | 4050118895537 | |
| Qty. | 1 pc(s). | |