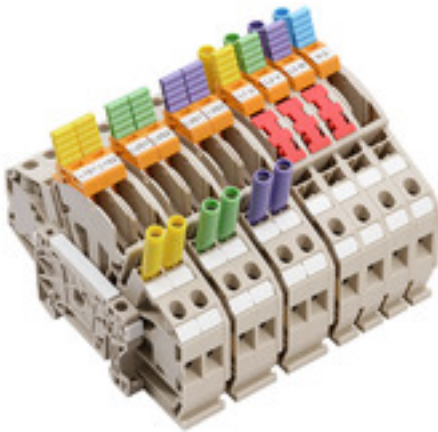


TABWESTNETZ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Version	Test-disconnect terminal, Screw connection, 6 mm ² , 30 A, sliding, Integral test socket: Yes, TS 35, beige
Order No.	8000095146
Type	TABWESTNETZ
GTIN (EAN)	4064675888550
Qty.	10 pc(s).

TABWESTNETZ

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	79 mm	Depth (inches)	3.11 inch
Height	100 mm	Height (inches)	3.937 inch
Width	115.3 mm	Width (inches)	4.539 inch
Net weight	413.865 g		

Temperatures

Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C
----------------------------------	--------	----------------------------------	--------

Material data

Material	Wemid	Colour	beige
Colour of operational elements	Miscellaneous	UL 94 flammability rating	V-0

System specifications

End cover plate required	No	Number of levels	1
Number of clamping points per level	20	Rail	TS 35
N-function	No	PE function	No
PEN function	No		

Additional technical data

Snap-on	Yes	Type of mounting	TS 35
---------	-----	------------------	-------

Conductors for clamping (rated connection)

Connection cross-section, stranded, max.	10 mm ²	Connection cross-section, stranded, min.	0.5 mm ²
Connection direction	on side	Number of connections	20
Type of connection	Screw connection	Wire connection cross section, finely stranded, max.	10 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, solid core, max.	10 mm ²
Wire connection cross-section, solid core, min.	0.5 mm ²		

General

Rail	TS 35	Standards	IEC 60947-7-1
------	-------	-----------	---------------

Rating data

Rated cross-section	6 mm ²	Rated current	30 A
Standards	IEC 60947-7-1	Pollution severity	3
Surge voltage category	III		

TABWESTNETZ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Classifications**

ETIM 6.0	EC000902	ETIM 7.0	EC000902
ETIM 8.0	EC000902	ETIM 9.0	EC000902
ECLASS 9.0	27-14-11-26	ECLASS 9.1	27-14-11-26
ECLASS 10.0	27-14-11-26	ECLASS 11.0	27-14-11-26
ECLASS 12.0	27-14-11-26	ECLASS 13.0	27-25-01-09

Downloads

Catalogues	Catalogues in PDF-format
------------	--