

**HDC 10A TOLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

Version	HDC enclosures, Size: 2, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 25
Order No.	<a href="#">1788610000</a>
Type	HDC 10A TOLU 1M25G
GTIN (EAN)	4032248206155
Qty.	1 pc(s).

**HDC 10A TOLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	72.5 mm	Depth (inches)	2.854 inch
Height	54 mm	Height (inches)	2.126 inch
Width	32.5 mm	Width (inches)	1.28 inch
Net weight	101 g		

**Temperatures**

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

**Dimensions**

Cable entry	w. thread	Height of housing B	54 mm
Total length housing	63 mm	Width housing C	29.5 mm

**General data**

EMC housings	No	Housing main material	diecast aluminium
Material of locking element		Protection degree	IP65 (in plugged condition)
	Stainless steel, rust-proof		
Surface finish	Powder coating	Tightening torque	0.5 Nm

**Version**

BG	2	Cable entry	w. thread
Clamp version	End-locking clamp	Colour (RAL)	RAL 7035
Design		Design of housing	Cable entry from top, Plug housing
	Standard		
Design of locking system	End-locking clamp, lower side	Internal thread	M 25
Number of cable entry on top	1	Number of cable entry sideways	0
Sealing	NBR	Size	2
Size of cable entries	M 25	Suitable for ModuPlug®	No
Tightening torque	0.5 Nm	Top part/bottom part/lid	upper part
Type	Plug		

**Classifications**

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ECLASS 9.0	27-44-02-02	ECLASS 9.1	27-44-02-02
ECLASS 10.0	27-44-02-02	ECLASS 11.0	27-44-02-02
ECLASS 12.0	27-44-02-02	ECLASS 13.0	27-44-02-02

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant
Substance	Ethyl alcohol
Chemical resistance	Resistant

**HDC 10A TOLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data**

Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	d447edfa-0214-4f34-b5ba-82eae491b46a
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@468ec7d6 de.myview.objectmodel.impl.BlockImpl@79217f69 de.myview.objectmodel.impl.BlockImpl@136b895 de.myview.objectmodel.impl.BlockImpl@66ec65ee de.myview.objectmodel.impl.BlockImpl@566cbe92 de.myview.objectmodel.impl.BlockImpl@24444901 de.myview.objectmodel.impl.BlockImpl@1082af0c de.myview.objectmodel.impl.BlockImpl@15c47be7 de.myview.objectmodel.impl.BlockImpl@26efdfe3 de.myview.objectmodel.impl.BlockImpl@20e5967e de.myview.objectmodel.impl.BlockImpl@251aa7a1 de.myview.objectmodel.impl.BlockImpl@13b7fba6 de.myview.objectmodel.impl.BlockImpl@4bff3ef4

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

**Downloads**

Engineering Data	<a href="#">CAD data – STEP</a>
Product Change Notification	<a href="#">20220214 Technical change to HDC housings</a> <a href="#">20220214 Technische Änderung bei HDC-Gehäusen</a>
Technical Documentation	<a href="#">1788610000 HDC_10A_TOLU_1M25G_STP_Blatt_1.pdf</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">FL FIELDWIRING EN</a> <a href="#">FL FIELDWIRING EN</a>

Creation date May 22, 2024 4:14:10 AM CEST


Catalogue status 18.05.2024 / We reserve the right to make technical changes.

## HDC 10A TOLU 1M25G

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

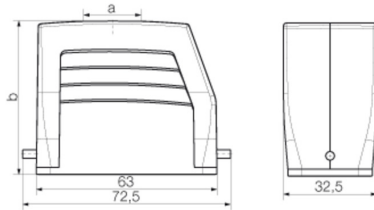

**HDC 10A TOLU 1M25G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Cover**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

Type	HDC 10A DODL 1LB	Version
Order No.	<a href="#">1665890000</a>	HDC enclosures, Size: 2, Protection degree: IP65 (in plugged condition), Cover for upper part of housing, End-locking clamp, lower side, Standard
GTIN (EAN)	4008190422929	
Qty.	1 pc(s).	