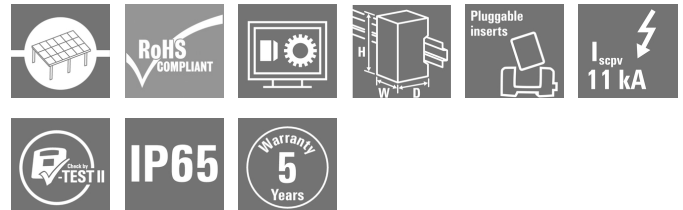


**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

PV Next combiner boxes for inverters with 1 to 12 MPP trackers are used to protect the DC side of a photovoltaic system. The combiner boxes protect the inverter against overvoltages and thus comply with the European Directive EN 51543-32. In addition, these products offer the possibility to protect the system against reverse currents and the possibility to combine strings to save cables during installation.

**General ordering data**

|                   |   |
|-------------------|---|
| Version           | Photovoltaics, Combiner Box, 1000 V, 1 MPP, 3 Inputs / 3 Outputs per MPP, With fuse holder, Surge protection I / II, WM4C |
| Order No.         | <a href="#">2683070000</a>  |
| Type              | PVN DC 3IF 30 1MPP SPD1R WM4 10   |
| GTIN (EAN)        | 4050118700053   |
| Qty.              | 1 pc(s).  |
| Replacement parts | <a href="#">2530600000</a> <a href="#">2534300000</a>   |

**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 175 mm  | Depth (inches)  | 6.89 inch  |
| Height     | 334 mm  | Height (inches) | 13.15 inch |
| Width      | 302 mm  | Width (inches)  | 11.89 inch |
| Net weight | 2,990 g |                 |            |

**Temperatures**

|                     |                 |          |                           |
|---------------------|-----------------|----------|---------------------------|
| Ambient temperature | -40 °C...+45 °C | Humidity | 5 - 90 %, no condensation |
|---------------------|-----------------|----------|---------------------------|

**DC string monitoring**

|                     |               |
|---------------------|---------------|
| Monitoring function | Non monitored |
|---------------------|---------------|

**Approvals and norms**

|           |                         |
|-----------|-------------------------|
| Approvals | EN 61439-2, IEC 61439-2 |
|-----------|-------------------------|

**Guarantee**

|               |         |
|---------------|---------|
| Time interval | 5 years |
|---------------|---------|

**Electrical characteristics**

Current per Maximum Power Point, max. 45 A

|                                     |                          |         |
|-------------------------------------|--------------------------|---------|
| Rated DC current per connection     | Current per string, max. | 35 A    |
| Rated short-term current resistance | Rated current            | 56.25 A |
| Rated DC voltage                    | 1,000 V                  |         |

**Enclosure**

|                        |   |                               |  |
|------------------------|---|-------------------------------|--|
| Connection type string | Plug WM4C                                       | Cover                         | with cover, removeable   |
| Enclosure attachment   |   | Impact resistance             | IK08 in accordance with IEC 62208, IK10 in accordance with IEC 62262 |
|                        | Via mounting feet                               |                               |  |
| Insulating material    | Polyester glass-fibre reinforced, Polycarbonate | Switch disconnecter execution | no switch  |
| Type of mounting       | Wall mounting, 4 screws                         |                               |  |

**General data**

|                       |                                       |                   |      |
|-----------------------|---------------------------------------|-------------------|------|
| Installation location | Protected outdoor area (Land and Sea) | Protection degree | IP65 |
|-----------------------|---------------------------------------|-------------------|------|

**Inputs**

|                                |                 |                              |                                     |
|--------------------------------|-----------------|------------------------------|-------------------------------------|
| Amount of maximum power points | 1 MPP           |                              |                                     |
| Cartridge fuse                 | 10 x 38 mm      |                              |                                     |
| DC Input + & -                 | Wire connection | Type of connection           | WM4C plug-in connector              |
|                                |                 | Compatible cable crossection | EN 50618:2015, TÜV 2 Pfg 1169/08.07 |
|                                |                 | Wire cross-section, min.     | 2.5 mm <sup>2</sup>                 |
|                                |                 | Wire cross-section, max.     | 6 mm <sup>2</sup>                   |

**PVN DC 3IF 30 1MPP SPD1R WM4 10**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**

|                                    |  |   |  |
|------------------------------------|--|---|--|
| Functional earth connector         | Cable entry  | Number of cable entries                   | 2                                      |
|                                    |  | Cable diameter, min.                      | 5                                      |
|                                    |  | Cable diameter, max.                      | 10                                     |
|                                    |  | Cable glands                              | M 16                                   |
|                                    | Wire connection  | Type of connection                        | Screw connection                       |
|                                    |  | Flexible, max. H05(07) V-K                | 25 mm <sup>2</sup>                     |
|                                    |  | w. wire end ferrule, DIN 46228 pt 1, max. | 16 mm <sup>2</sup>                     |
| Fuse type                          | Empty fuse holder                                      |   |  |
| Fuse-link standard                 | IEC 60269-1, IEC 60269-6, gPV (EN 60269-6)             |   |  |
| Max. number of DC inputs           | per Maximum Power Point 3 inputs connected in parallel |   |  |
| Surge protection auxiliary contact | Cable entry  | Number of cable entries                   | 2                                      |
|                                    |  | Cable diameter, min.                      | 5                                      |
|                                    |  | Cable diameter, max.                      | 10                                     |
|                                    |  | Cable glands                              | M 16                                   |
|                                    | Wire connection  | Type of connection                        | Tension clamp connection with actuator |
|                                    |  | Flexible, max. H05(07) V-K                | 1.5 mm <sup>2</sup>                    |
|                                    |  | w. wire end ferrule, DIN 46228 pt 1, max. | 1.5 mm <sup>2</sup>                    |

**Outputs**

|                           |   |                                |                                    |
|---------------------------|---|--------------------------------|------------------------------------|
| DC Output + & -           | Wire connection   | Type of connection             | WM4C plug-in connector             |
|                           |   | Compatible cable cross-section | TÜV 2 Pfg1169/08.07, EN 50618:2015 |
|                           |   | Wire cross-section, min.       | 4 mm <sup>2</sup>                  |
|                           |   | Wire cross-section, max.       | 6 mm <sup>2</sup>                  |
| Max. number of DC outputs | per Maximum Power Point 3 outputs connected in parallel |                                |                                    |

**Surge protection DC side**

|  |               |  |               |
|--|---------------|--|---------------|
| Discharge current $I_n$ (8/20 $\mu$ s)             | 20 kA         | Discharge current, max. (8/20 $\mu$ s)                             | 40 kA         |
| Lightning test current $I_{imp}$ (10/350 $\mu$ s)  | 6.25 kA       | Maximum continuous operating voltage DC UCPV mode +/-, -/PE, +/-PE | 1,100 V       |
| PV system voltage, max. $U_{cpv}$                  | 1,100 V       | Protection level $U_p$ (+/-, -/PE, +/-PE)                          | $\leq 3.8$ kV |
| Protection level $U_p$ (+/-)                       | $\leq 3.8$ kV | Protection level $U_p$ (+/PE)                                      | $\leq 3.8$ kV |
| Protection level $U_p$ (-/PE)                      | $\leq 3.8$ kV | Requirements class   | Type I/II     |
| Short-circuit current $I_{SCP}$                    | 11,000 A      | Standby power consumption $P_C$                                    | < 0.2 W       |
| Total discharge current $I_{total}$ (8/20 $\mu$ s) | 50 kA         | Total discharge current $I_{total}$ (10/350 $\mu$ s)               | 12.5 kA       |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002928    | ETIM 7.0    | EC002928    |
| ETIM 8.0    | EC003857    | ETIM 9.0    | EC003857    |
| ECLASS 9.0  | 22-57-92-03 | ECLASS 9.1  | 22-57-02-90 |
| ECLASS 10.0 | 22-57-02-90 | ECLASS 11.0 | 22-57-02-92 |
| ECLASS 12.0 | 22-57-02-92 | ECLASS 13.0 | 22-57-02-92 |

## PVN DC 3IF 30 1MPP SPD1R WM4 10

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Tender specification sheets

## Long specification

Combiner box for inverters with 1 MPP tracker, suitable for protecting the DC side of a photovoltaic system according to EN 51543-32.

## MPP1:

3 inputs, connection via WM4 C connector, compatible with cable type TÜV 2 Pfg1 169/08.07 / EN 50618:2063

3 outputs, connection via WM4 C connector, compatible with cable type TÜV 2 Pfg1 169/08.07 / EN 50618:2063

Max. string voltage Uoc: 1000V

1 class/type I + II combined arrester with signal contact

Fuse holders for inputs and outputs (fuses 10x38 to be ordered separately)

Connection of the signal contact via cable glands (8-12mmØ) max. conductor cross-section: 1.5mm<sup>2</sup>

Connection of the functional earth via cable glands (8-12mmØ) Conductor cross-section: 16-25mm<sup>2</sup>

Protection class: IP65

All built into a glass fibre reinforced polyester housing. Dimensions HxWxD: 334x302x175 mm

Approval according to low voltage switchgear and controlgear IEC 61439-1:2011 and EN 61439-2:2011

## Important note

Product information

Fuses are not included

## Approvals

Approvals



## PVN DC 3IF 30 1MPP SPD1R WM4 10

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of Conformity

[EU Declaration of Conformity](#)

Engineering Data

[CAD data – PV Next Schematic Diagram](#)

[CAD data – STEP](#)

Technical Documentation

[customer drawing](#)

User Documentation

[Manual PV Next String Combiner Box](#)

[MANUAL PV NEXT IT/ES/FR](#)

White paper

[Fact Sheet DE PV CB Wie man Gebäude gegen Blitzeinschläge schützt](#)

[Fact Sheet DE PV Wie man die Lebensdauer eines GAK verlängert](#)

[Fact Sheet DE PV CB Wann Sicherungen zu installieren sind](#)

[Fact Sheet DE CB PV NEXT](#)

[Fact Sheet EN PV CB When DC fuses are mandatory to install](#)

[Fact Sheet EN CB PV NEXT](#)

[Fact Sheet EN PV How to protect buildings against lightning strikes](#)

[Fact Sheet EN PV How to extend the life time of a Combiner Box](#)

[Fact Sheet DE CB PV Strings kombinieren](#)

[Fact Sheet DE PV CB Richtig verbinden](#)

[Fact Sheet EN CB Combining PV strings](#)

[Fact Sheet EN PV CB connection](#)

[Fact Sheet EN PV Combiner Box earthing](#)

[Fact Sheet DE PV Combiner Box Erdung](#)

Catalogues

[Catalogues in PDF-format](#)

## PVN DC 3IF 30 1MPP SPD1R WM4 10

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## PCB design



| PVN 1 M2 I6 S0 F3 V1 Q1 TX PX 10 |  |                |  |                       |  |                   |  |                    |  |
|----------------------------------|--|----------------|--|-----------------------|--|-------------------|--|--------------------|--|
| <b>Series</b>                    |  | <b>Voltage</b> |  | <b>Powersupply</b>    |  | <b>Monitoring</b> |  | <b>Output Type</b> |  |
| PVN = PV Next                    |  | 10 ~ 1kV       |  | x = n/a               |  | x = n/a           |  | 0 = DG             |  |
| VPU = PV Protect                 |  | 11 ~ 1.1kV     |  |                       |  |                   |  | 1 = VMAC           |  |
| <b>Level</b>                     |  | <b>SPD</b>     |  | <b>Fuses</b>          |  |                   |  |                    |  |
| 1 = DC trunk box (L1)            |  | 0 = No SPD     |  | 3 = only fuse holders |  |                   |  |                    |  |
| <b>Series</b>                    |  |                |  |                       |  |                   |  |                    |  |
| 1 = 1 MPP supported              |  |                |  |                       |  |                   |  |                    |  |
| 2 = 2 MPP supported              |  |                |  |                       |  |                   |  |                    |  |
| 3 = 3 MPP supported              |  |                |  |                       |  |                   |  |                    |  |
| 4 = 4 MPP supported              |  |                |  |                       |  |                   |  |                    |  |
| 6 = 6 MPP supported              |  |                |  |                       |  |                   |  |                    |  |
| <b>Inputs</b>                    |  |                |  |                       |  |                   |  |                    |  |
| 1..12 inputs                     |  |                |  |                       |  |                   |  |                    |  |
| <b>Switch</b>                    |  |                |  |                       |  |                   |  |                    |  |
| x = n/a                          |  |                |  |                       |  |                   |  |                    |  |
| 0 = manual switch                |  |                |  |                       |  |                   |  |                    |  |
| 1 = remote switch                |  |                |  |                       |  |                   |  |                    |  |

## PVN DC 3IF 30 1MPP SPD1R WM4 10

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Replacement parts

## Spare Arrester



## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | VPU PV I+II O 1000         | Version  |
| Order No.  | <a href="#">2530600000</a> | Surge voltage arrester, Low voltage, Accessories, Surge protection I / |
| GTIN (EAN) | 4050118540819              | II, Spare arrester   |
| Qty.       | 9 pc(s).                   |  |
| Type       | VPU PV I+II OM 1000        | Version  |
| Order No.  | <a href="#">2534300000</a> | Surge voltage arrester, Low voltage, Surge protection I / II, Spare    |
| GTIN (EAN) | 4050118545906              | arrester   |
| Qty.       | 9 pc(s).                   |  |

**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****PV Sun Covers****General ordering data**

|            |                            |               |
|------------|----------------------------|---------------|
| Type       | PV SUN COVER 37/30/18      | Version       |
| Order No.  | <a href="#">8000087024</a> | Photovoltaics |
| GTIN (EAN) | 4064675845171              |               |
| Qty.       | 1 pc(s).                   |               |

**Cutting tools**

Cutting tools for conductors up to 8 mm, 12 mm, 14 mm and 22 mm outside diameter. The special blade geometry allows pinch-free cutting of copper and aluminium conductors with minimum physical effort. The cutting tools (KT 8 to KT 22) also come with VDE and GS-tested protective insulation up to 1,000 V in accordance with EN/IEC 60900.

**General ordering data**

|            |                            |  |
|------------|----------------------------|--|
| Type       | KT 14                      | Version  |
| Order No.  | <a href="#">1157820000</a> | Cutting tools, Cutting tool for one-hand operation |
| GTIN (EAN) | 4032248945344              |  |
| Qty.       | 1 pc(s).                   |  |



## PVN DC 3IF 30 1MPP SPD1R WM4 10

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

### PV-Stick field connectors



Faster is better. This also applies to the cabling of solar systems. Our handy connectors stay firmly in your grip even in frosty temperatures and can be installed very quickly and easily without a crimping tool.

You don't need crimp contacts and crimping tools and you avoid assembly errors. This saves up to 50% installation time – without affecting quality. The new photovoltaic connectors are TÜV-approved and comply with IEC 62852.

Our "PUSH IN" technology enables safe connections with minimal effort – insert, turn: current!

- 1.500 V DC (DE) / 1,500 V DC (EN)
- PUSH IN technology
- Standard-compliant quality in accordance with IEC 62852
- Ergonomic, prize-winning design
- Fastest PV connector currently available
- Reliable latching

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | PV-STICK- VPE10            | Version  |
| Order No.  | <a href="#">1303490000</a> | Photovoltaics, Plug-in connector, PUSH IN connection, male   |
| GTIN (EAN) | 4050118102529              |  |
| Qty.       | 10 pc(s).                  |  |
| Type       | PV-STICK+ VPE10            | Version  |
| Order No.  | <a href="#">1303450000</a> | Photovoltaics, Plug-in connector, PUSH IN connection, female |
| GTIN (EAN) | 4050118102468              |  |
| Qty.       | 10 pc(s).                  |  |

### Tools



- For flexible and solid conductors with special insulating materials
- High-quality stripping for industrial applications (complies with aircraft industry requirements)
- Specially shaped blades enable stripping of special types of insulation and conductor configurations
- Stripping length adjustable via end stop
- Very versatile thanks to interchangeable stripping units
- Stripping results reproduced accurately over and over again
- No damage to the conductor
- A long-lasting, reliable tool thanks to its sturdy design
- Integrated cutting function

### General ordering data

|            |                            |                                  |
|------------|----------------------------|----------------------------------|
| Type       | MULTI-STRIPAX PV           | Version                          |
| Order No.  | <a href="#">1190490000</a> | Photovoltaics, Plug-in connector |
| GTIN (EAN) | 4032248973262              |                                  |
| Qty.       | 1 pc(s).                   |                                  |

**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold


Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Crosshead screwdriver Phillips**

VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

**General ordering data**

|            |                            |  |
|------------|----------------------------|--|
| Type       | SDIK PH3 X 150             | Version  |
| Order No.  | <a href="#">2749910000</a> | Screwdriver, Blade width (B): 3 mm, 150 mm, Blade thickness (A): 3 |
| GTIN (EAN) | 4050118897210              |  |
| Qty.       | 1 pc(s).                   |  |

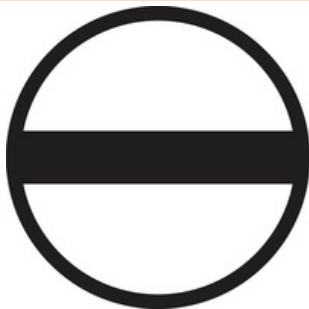**Slotted screwdriver**

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | SDIS 1.0X5.5X125           | Version   |
| Order No.  | <a href="#">2749850000</a> | Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade thickness (A): 1 mm   |
| GTIN (EAN) | 4050118897050              |   |
| Qty.       | 1 pc(s).                   |   |
| Type       | SDIS 0.6X3.5X100           | Version   |
| Order No.  | <a href="#">2749810000</a> | Screwdriver, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade thickness (A): 0.6 mm |
| GTIN (EAN) | 4050118897012              |   |
| Qty.       | 1 pc(s).                   |   |

**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Accessories**

The dust protection cap "Dustcap VSSO" protects the Weidmüller and type 4 solar connectors against dust and dirt.

The "SafetyClip" protects the Weidmüller solar connectors against unintentional opening and can only be released using the special multi-tool.

**General ordering data**

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | VSSO WM4 C                 | Version                    |
| Order No.  | <a href="#">1254870000</a> | Photovoltaics, Flat design |
| GTIN (EAN) | 4050118047479              |                            |
| Qty.       | 100 pc(s).                 |                            |

**Y-Connector Cables**

The Y or X cable is used to connect three or four elements of a PV system, such as the connection between PV panels, inverters and surge protection boxes. The cables are available in different connection variants.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | PVHYW-XXW+XX06W+15         | Version   |
| Order No.  | <a href="#">2814180000</a> | Photovoltaics, Y-Connector Cable, 1x WM4 C Male, 2x WM4 C   |
| GTIN (EAN) | 4064675298861              | Female, 6mm², 1500 V  |
| Qty.       | 1 pc(s).                   |   |
| Type       | PVHYW+XXW-XX06W-15         | Version   |
| Order No.  | <a href="#">2814190000</a> | Photovoltaics, Y-Connector Cable, 1x WM4 C Female, 2x WM4 C |
| GTIN (EAN) | 4064675298878              | Male, 6mm², 1500 V  |
| Qty.       | 1 pc(s).                   |   |

## PVN DC 3IF 30 1MPP SPD1R WM4 10

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

### External fixing lugs



The enclosures of the TBF series are made of extremely tough glass fibre-reinforced polyester. These enclosures are ideal for applications that call for low weight coupled with high shock resistance. The weather-resistant TBF enclosures are designed for a wide range of applications. Together with their comprehensive range of accessories, they provide universal solutions for accommodating built-in items such as regulators, measuring instruments, valves and other equipment.

Features:

- 9 sizes in 2 versions, with grey and transparent lids
- Cover with nylon screws
- Fixing holes outside the sealed area
- Thread for fitting to terminal rails and mounting plates
- Comprehensive accessories
- Weidmüller can manufacture and supply this enclosure to match customer specifications, fitted with all necessary terminals and cable glands.

### General ordering data

| Type       | MF TBF                     | Version  |
|------------|----------------------------|--|
| Order No.  | <a href="#">0360800000</a> | TBF (polyester empty enclosure), Mounting foot, Fixing lugs, Height: |
| GTIN (EAN) | 4008190108595              | 72.5 mm, Width: 24 mm, Depth: 12 mm, Material: Polyamide, Deep       |
| Qty.       | 1 pc(s).                   | black  |

### UV-resistant cable ties



UV-resistant polyamide 6.6 ensures long durability of our special cable ties even with strong UV radiation. Ideal for continuous outdoor use.

### General ordering data

| Type       | CB-UVR 290/4,5 BK          | Version                                       |
|------------|----------------------------|---|
| Order No.  | <a href="#">2659350000</a> | Cable ties, 4.5 x 290 mm, Polyamide 66, 220 N |
| GTIN (EAN) | 4050118682816              |   |
| Qty.       | 100 pc(s).                 |   |

**PVN DC 3IF 30 1MPP SPD1R WM4 10**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Accessories**
**10x38 gPV**


The gPV cylindrical fuse cartridges are designed to provide compact, safe and economical protection of photovoltaic modules (field protection) with voltages up to 1,500 DC. They provide protection against both overload and short circuit (gPV class according to the requirements of IEC60269-6 and UL248-19 standards). Made of a ceramic tube with high internal pressure and thermal shock resistance, allowing high switching capacity in a small space. The contacts are made of silver-plated copper and the fusible elements of pure silver to avoid ageing and thus keep the electrical characteristics invariable. They are available in the sizes 10x38 mm, 10x85 mm and 22x58 mm.

**General ordering data**

|            |                             |   |
|------------|-----------------------------|---|
| Type       | FUSE 10X38 20A 1000 VDC ... | Version   |
| Order No.  | <a href="#">2783280000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 20 A |
| GTIN (EAN) | 4064675060000               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 4A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783190000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 4 A  |
| GTIN (EAN) | 4064675059912               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 6A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783210000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 6 A  |
| GTIN (EAN) | 4064675059936               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 15A 1000 VDC ... | Version   |
| Order No.  | <a href="#">2783250000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 15 A |
| GTIN (EAN) | 4064675059974               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 5A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783200000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 5 A  |
| GTIN (EAN) | 4064675059929               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 2A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783170000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 2 A  |
| GTIN (EAN) | 4064675059691               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 1A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783160000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 1 A  |
| GTIN (EAN) | 4064675059684               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 12A 1000 VDC ... | Version   |
| Order No.  | <a href="#">2783240000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 12 A |
| GTIN (EAN) | 4064675059967               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 10A 1000 VDC ... | Version   |
| Order No.  | <a href="#">2783230000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 10 A |
| GTIN (EAN) | 4064675059950               |   |
| Qty.       | 10 pc(s).                   |   |

**PVN DC 3IF 30 1MPP SPD1R WM4 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories**


|            |                             |   |
|------------|-----------------------------|---|
| Type       | FUSE 10X38 16A 1000 VDC ... | Version   |
| Order No.  | <a href="#">2783260000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 16 A |
| GTIN (EAN) | 4064675059981               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 3A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783180000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 3 A  |
| GTIN (EAN) | 4064675059905               |   |
| Qty.       | 10 pc(s).                   |   |
| Type       | FUSE 10X38 8A 1000 VDC ...  | Version   |
| Order No.  | <a href="#">2783220000</a>  | Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 8 A  |
| GTIN (EAN) | 4064675059943               |   |
| Qty.       | 10 pc(s).                   |   |

## PVN DC 3IF 30 1MPP SPD1R WM4 10

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings



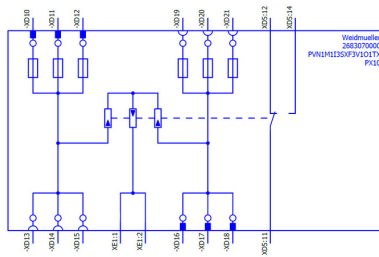


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. Weidmüller exclusively reserves the right to file for patents, utility models or designs.

© Weidmüller Interface GmbH & Co. KG

Dimensions without tolerances are no check dimensions

The English version is binding

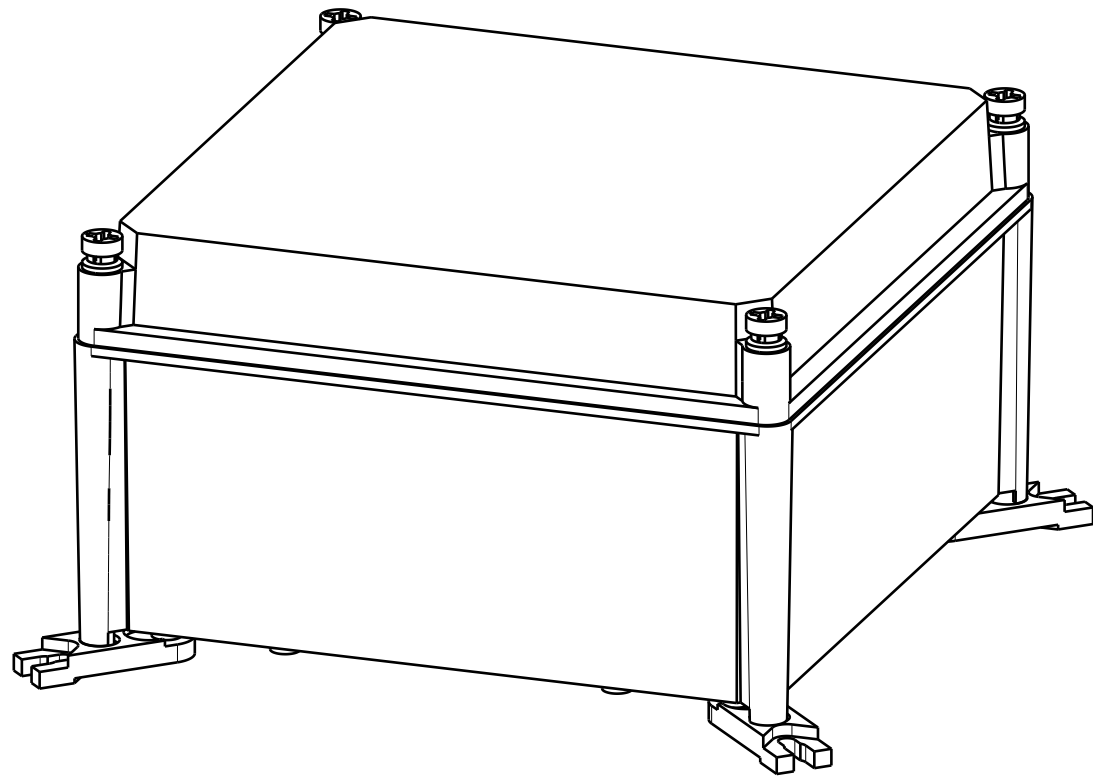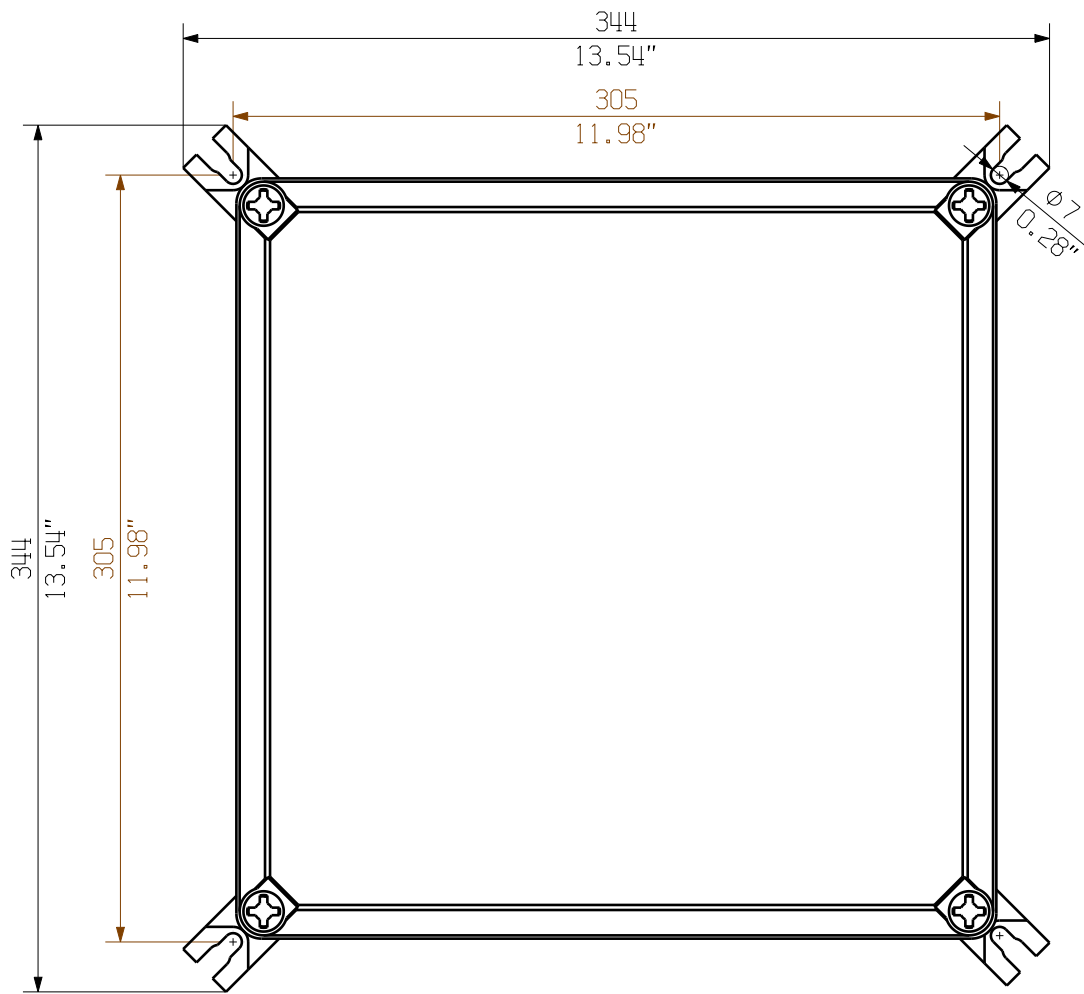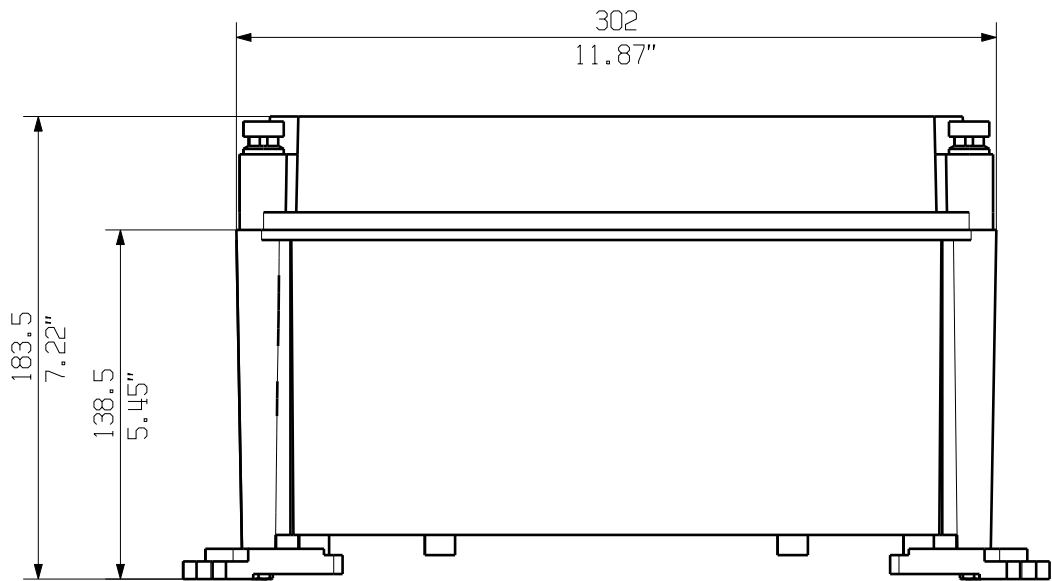

Darstellung mit Zubehoer  
Shown with accessory 0360800000 MF TBF  
Nicht im Lieferumfang enthalten!  
Not included in delivery!

|   |              |                            |   |   |  |
|---|--------------|----------------------------|---|---|--|
|   |              | Prim PLM Part No.: 1174506 |   | Prim ERP Part No.:  |  |
| First Issue Date<br>29.01.2020  | Max. nos.    |                            | <b>Weidmüller</b>  |   | <b>71730</b><br>Drawing no. Issue no.<br>Sheet 01 of 01 sheets |
|   | Modification |                            |   |   |  |
|  |              | Date                       | Name  | <b>PVN TBF 303018</b><br>COMBINERBOX RESIDENTIAL/COMMERCIAL<br>COMBINERBOX RESIDENTIAL/COMMERCIAL |  |
|   | Drawn        | 29.01.2020                 | Brüntrup, Anna  |   |  |
| Responsible   |              | Wohlgemuth, KI             |   |   |  |
| Approved  | 31.01.2020   | Püschner, Klau             |   |   |  |
| Scale: 1/3      Size: A3  |              |                            |   | Product file:   |  |
| Drawings Customer   |              |                            |   |   |  |