

**ACT20M-RTI-AO-E-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image****ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

**General ordering data**

Version	Temperature converter, Without galvanic isolation, Input : Temperature, PT100, Output : I / U
Order No.	<a href="#">1375520000</a>
Type	ACT20M-RTI-AO-E-S
GTIN (EAN)	4050118259681
Qty.	1 pc(s).

**ACT20M-RTI-AO-E-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	114.3 mm	Depth (inches)	4.5 inch
Height	112.5 mm	Height (inches)	4.429 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	86 g		

**Temperatures**

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...70 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	40 °C / 93 % rel. humidity, no condensation

**Probability of failure**

MTBF	195 a
------	-------

**Input**

Influence of the sensor cable resistance	<0.002 Ω/Ω (@ 3/4-wire)	Line resistance in measuring circuit	≤ 50 Ω
Number of inputs	1	Sensor	PT100 (2-/3-/4- wire)
Temperature input range	Configurable, PT100: -200...+850 °C, min. measurement range 10°C (RTD)		

**Output**

Load impedance current	≤ 600 Ω	Number of outputs	1
Output current	configurable, 0...20 mA, 4...20 mA	Output signal limit	<4 mA (average), <60 mA (pulse current), low duty cycle
Output voltage, note	configurable, 0(2)...10 V, 0(1)...5 V	Type	active, connected control must be passive
Wire break detection	Yes, Configurable, 3.5 mA / 23 mA / none	load impedance voltage	≥ 10 kΩ

**General data**

Accuracy	absolute accuracy: <±0.1 % of the measurement range	
Configuration	DIP switch	
Delivery state	Input: 0...10 V // Bandwidth: 50 Hz // Output: 0...20 mA // Output 2: 0...20 mA // Noise suppression: enabled // Start temperature: -200 °C // End temperature: 0 °C	
Delivery state	Setting parameters	Input
	Configuration	0...10 V
	Setting parameters	Bandwidth
	Configuration	50 Hz
	Setting parameters	Output
	Configuration	0...20 mA
	Setting parameters	Output 2
	Configuration	0...20 mA
	Setting parameters	Noise suppression
	Configuration	enabled
	Setting parameters	Start temperature
	Configuration	-200 °C
	Setting parameters	End temperature
	Configuration	0 °C
Galvanic isolation	Without isolation	

Creation date August 24, 2024 9:45:43 PM CEST

**ACT20M-RTI-AO-E-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

Power consumption, max.	0.5 W
Power consumption, typ.	0.37 W
Protection degree	IP20
Rail	TS 35
Step response time	Configurable, ≤ 30 ms, <300 ms
Temperature coefficient	≤0.01 % of the measurement range/°C or 0.02 °C/°C
Voltage supply	24 V DC ± 30 %

**Insulation coordination**

EMC standards	IEC 61326-1	Galvanic isolation	Without isolation
Pollution severity	2		

**Data for Ex applications (ATEX)**

Installation location	Device installed in safe area, zone 2	Marking	II 3 G Ex nA IIC T4 Gc
-----------------------	---------------------------------------	---------	------------------------

**Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

**EMC conformity and approvals**

EMC standards	IEC 61326-1	Standards	IEC 61010-1
---------------	-------------	-----------	-------------

**Classifications**

ETIM 6.0	EC002919	ETIM 7.0	EC002919
ETIM 8.0	EC002919	ETIM 9.0	EC002919
ECLASS 9.0	27-21-01-29	ECLASS 9.1	27-21-01-29
ECLASS 10.0	27-21-01-29	ECLASS 11.0	27-21-01-29
ECLASS 12.0	27-21-01-29	ECLASS 13.0	27-21-01-29
ECLASS 14.0	27-21-01-29		

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924
RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl

**Important note**

Product information	<p>The ACT20M-RTI-AO-S configurable temperature transducer isolates and converts analogue signals. An analogue RTD input signal (Type Pt100) is linearly converted into an analogue output signal and galvanically isolated. The power supply is galvanically isolated from the input and output (3-way isolation) and this is done with direct wiring or over the Weidmüller rail bus.</p> <p>The ACT20M-RTI-AO-E-S configurable temperature transducer offers the same functionality but does not provide galvanic isolation.</p>
---------------------	---

## ACT20M-RTI-AO-E-S

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

## Downloads

Approval/Certificate/Document of Conformity	<a href="#">DNV-GL certificate</a> <a href="#">FM certificate</a> <a href="#">IECEX certificate</a> <a href="#">ATEX certificate</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Software	<a href="#">DIP switch configuration tool</a>
User Documentation	<a href="#">instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	


# ACT20M-RTI-AO-E-S

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

## Drawings

### Connection diagram

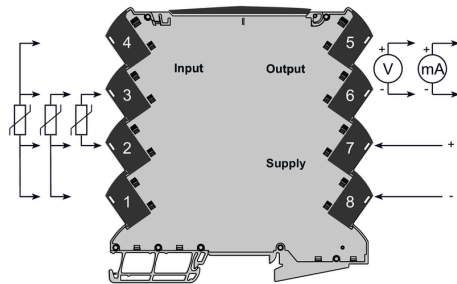


### Dimensional drawing

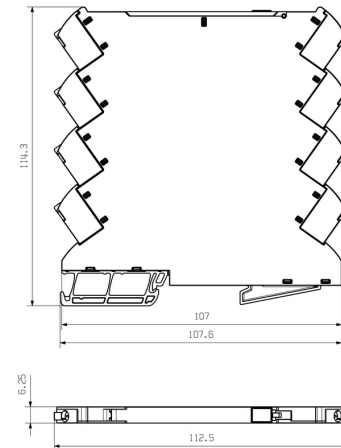

#### DIP switch setting

		Temperature range [°C]															
		PT100, 2-wire				PT100, 3-wire				PT100, 4-wire				PT100, 5-wire			
RTD sensor type	S1	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2
PT100, 2-wire	1	-200	1	0	1	-200	1	0	1	-200	1	0	1	-200	1	0	1
PT100, 3-wire	2	-200	2	0	2	-200	2	0	2	-200	2	0	2	-200	2	0	2
PT100, 4-wire	3	-200	3	0	3	-200	3	0	3	-200	3	0	3	-200	3	0	3
PT100, 5-wire	4	-200	4	0	4	-200	4	0	4	-200	4	0	4	-200	4	0	4
Output	5	-20	5	20	5	-20	5	20	5	-20	5	20	5	-20	5	20	5
0...20 mA	6	-20	6	20	6	-20	6	20	6	-20	6	20	6	-20	6	20	6
4...20 mA	7	-20	7	20	7	-20	7	20	7	-20	7	20	7	-20	7	20	7
0...10 V	8	-20	8	20	8	-20	8	20	8	-20	8	20	8	-20	8	20	8
2...10 V	9	-20	9	20	9	-20	9	20	9	-20	9	20	9	-20	9	20	9
0...5 V	10	-20	10	20	10	-20	10	20	10	-20	10	20	10	-20	10	20	10
1...5 V	11	-20	11	20	11	-20	11	20	11	-20	11	20	11	-20	11	20	11
Sensor error detection	12	20	12	60	12	20	12	60	12	20	12	60	12	20	12	60	12
none	13	20	13	60	13	20	13	60	13	20	13	60	13	20	13	60	13
enabled	14	20	14	60	14	20	14	60	14	20	14	60	14	20	14	60	14
Output error level	15	20	15	60	15	20	15	60	15	20	15	60	15	20	15	60	15
discrete	16	20	16	60	16	20	16	60	16	20	16	60	16	20	16	60	16
variable	17	20	17	60	17	20	17	60	17	20	17	60	17	20	17	60	17
Noise suppression	18	20	18	60	18	20	18	60	18	20	18	60	18	20	18	60	18
50 Hz	19	20	19	60	19	20	19	60	19	20	19	60	19	20	19	60	19
60 Hz	20	20	20	60	20	20	20	60	20	20	20	60	20	20	20	60	20
Response time	21	20	21	60	21	20	21	60	21	20	21	60	21	20	21	60	21
4...30 ms	22	20	22	60	22	20	22	60	22	20	22	60	22	20	22	60	22
300 ms	23	20	23	60	23	20	23	60	23	20	23	60	23	20	23	60	23

example for DIP switch setting  
 (with ACT20M tool software)

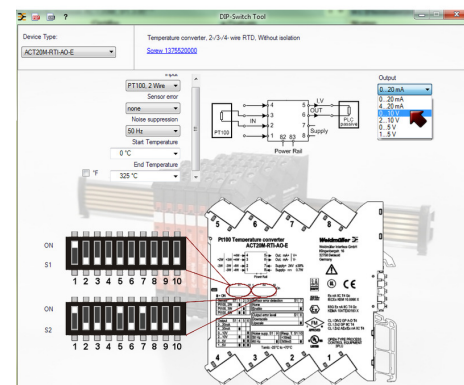

example for DIP switch setting  
 (with ACT20M tool software)