

PV 212S0F3CXXV100TA1PA15LWW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Standard portfolio for 1 MPPT string inverters
Protect and monitor strings in solar parks with
string inverters with 1 MPPT.**

The following PV DC combiner box portfolio is meant to be used with string inverters with one Maximum Power Point Tracker (MPPT) in order to bundle, protect and isolate the number of strings these inverters use. 1 MPPT

General ordering data

| | |
|------------|--|
| Version | Photovoltaics, Assembled enclosure, Combiner Box, 1500 V, With fuse holder, Surge protection II, Cable gland, for wall mounting, Switch disconnect, Landscape, Current monitoring, Voltage monitoring, Temperature monitoring, String Inverter |
| Order No. | 8000115485 |
| Type | PV 212S0F3CXXV100TA1PA15LWW |
| GTIN (EAN) | 4099986757486 |
| Qty. | 1 pc(s). |

PV 212S0F3CXXV100TA1PA15LWW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|--------------|-----------------|-------------|
| Depth | 300 mm | Depth (inches) | 11.811 inch |
| Height | 636 mm | Height (inches) | 25.039 inch |
| Width | 847 mm | Width (inches) | 33.346 inch |
| Net weight | 13,786.751 g | | |

Temperatures

| | | | |
|---------------------|-----------------|-----------------------|-----------------|
| Ambient temperature | -20°C to +45 °C | Operating temperature | -20°C to +45 °C |
|---------------------|-----------------|-----------------------|-----------------|

DC electrical properties

| | | | |
|--------------------------|------------------------------------|--------------------|----------------------|
| Earthing | Directly at the VPU | Rated voltage | 1,500 V |
| Surge protection DC side | 1500 V type II with remote contact | Switching capacity | 400 A (DC21B 1500 V) |

DC inputs

| | | | |
|---------------------------------|------------------------------------|-------------------------|-----------------|
| Amount of maximum power points | 1 | | |
| Cartridge fuse | 10 x 85 mm | | |
| Connection DC input cable (+) | Screw connection | | |
| Connection DC input cable (-) | Screw connection | | |
| Connection type, DC input cable | Cable gland | | |
| DC Input + & - | Wire connection | Type of connection | M16 Cable gland |
| | Cable entry | Number of cable entries | 24 |
| | | Cable diameter, min. | 5 mm |
| | | Cable diameter, max. | 10 mm |
| Functional earth connector | Cable entry | Number of cable entries | 1 |
| | | Cable diameter, min. | 6 mm |
| | | Cable diameter, max. | 12 mm |
| | Wire connection | Type of connection | M20 Cable gland |
| Fuse | Empty fuse holder | | |
| Fuse | 15 A, 16 A, 20 A, 25 A, 30 A, 32 A | | |
| Fuse type | Empty fuse holder | | |
| Fuse-link standard | gPV (EN 60269-6) | | |
| Fused poles of string | +/- | | |
| Number of DC inputs | 12 | | |
| Position of the fuses | positive and negative inputs | | |

DC outputs

| | | | |
|---|-----------------------------|--------------------------|--------------------|
| Connection type, DC output cable | Screw terminal connectors | | |
| DC Output + & - | Wire connection | Type of connection | M40 Cable gland |
| | | Wire cross-section, min. | 22 mm ² |
| | | Wire cross-section, max. | 32 mm ² |
| DC output cable connection | M10 bolt and nut connection | | |
| Load circuit breaker with auxiliary contact | No | | |
| Number of DC outputs | 2 | | |

PV 212S0F3CXXV100TA1PA15LWW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

DC string monitoring

| | | | |
|--------------------|--------------|------------------------|---|
| Current monitoring | Solar SMS | Monitoring function | Solar SMS, Output voltage, current, temperature |
| Supply | Self-powered | Temperature monitoring | Solar SMS |
| Voltage monitoring | Solar SMS | | |

Housing

| | | | |
|-------------------|------|------------------|---------------|
| Protection degree | IP65 | Type of mounting | Wall mounting |
|-------------------|------|------------------|---------------|

Norms and standards

| | |
|-----------|-------------------------------------|
| Standards | EN 61439-2:2011, IEC 61439-2 ed 3.0 |
|-----------|-------------------------------------|

Guarantee

| | |
|---------------|---------|
| Time interval | 5 years |
|---------------|---------|

Electrical characteristics

| | | | |
|------------------|---------|---------------------------------|-------------|
| Rated DC voltage | 1,500 V | Switching disconnecter capacity | IEC 60947-3 |
|------------------|---------|---------------------------------|-------------|

Enclosure

| | | | |
|-------------------------------|---|----------------------|---|
| Connection type string | Internal terminal (with cable gland feed-through) | Enclosure attachment | Fixing lugs |
| Impact resistance | IK10 in accordance with IEC 62262 | Insulating material | Polyester glass-fibre reinforced, Polycarbonate |
| Switch disconnecter execution | switch inside enclosure | Type of mounting | Wall mounting |

General data

| | | | |
|-----------------------|---|-------------------|------|
| Installation location | Protected outdoor area (>1 km from sea) | Protection degree | IP65 |
| Standards | EN 61439-2:2011, IEC 61439-2 ed 3.0 | | |

Surge protection DC side

| | | | |
|---------------------------------|------------------------------------|-----------|-------------------------------------|
| Short-circuit current I_{SCP} | 20.75 A | Standards | EN 61439-2:2011, IEC 61439-2 ed 3.0 |
| Surge protection DC side | 1500 V type II with remote contact | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002928 | ETIM 7.0 | EC002928 |
| ETIM 8.0 | EC003857 | ETIM 9.0 | EC003857 |
| ECLASS 9.0 | 22-57-92-03 | ECLASS 9.1 | 22-57-02-90 |
| ECLASS 10.0 | 22-57-02-90 | ECLASS 11.0 | 22-57-02-92 |
| ECLASS 12.0 | 22-57-02-92 | ECLASS 13.0 | 22-57-02-92 |

PV 212S0F3CXXV100TA1PA15LWW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity

[EU Declaration of Conformity Combiner Boxes monitored](#)

Technical Documentation

[Mechanical Drawing](#)[Electrical Drawing](#)

User Documentation

[User Manual PV DC Combiner Boxes](#)

Catalogues


[Catalogues in PDF-format](#)

PV 212S0F3CXXV100TA1PA15LWW

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

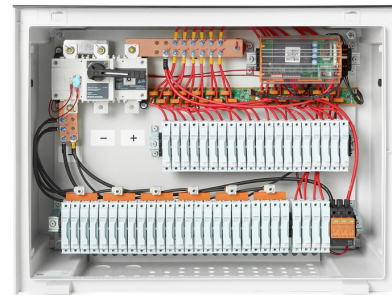

PV 212S0F3CXXV100TA1PA15LWW

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Combiner Box Name Description

PV 2 24 S0 FX CXX VX OX TXPX 15 P F ES

PV 1: PV DC L0 Industrial
PV 2: PV DC L1 Industrial
PV 3: PV DC L2 Industrial

Number of inputs (01-36)

S0: Switch-disconnector

S0 → Switch-disconnector (SW)
 S1 → Switch-disconnector with remote disconnection (SW RD)
 S2 → Molded Case Circuit Breaker (MCCB)
 S3 → Molded switch-disconnector (SW M)
 S4 → Switch-disconnector with Contactor (SW K)
 S5 → No switch-disconnector needed (N/A)

FX: Fuses / Fuseholders position

F0 → Fuses Both Poles
 F1 → Only Positive Fuses
 F2 → Only Negative Fuses
 F3 → Only Fuse Holders
 F4 → Only Fuse holder in negative (-)
 F5 → Only Fuse holder in negative (+)
 F6 → No Fuse holders needed (N/A)

CXX: CIL Fuses Type → C 10/15/16/20/25/30/40/50/55/60/63/80 - (Example C20)

NXX: NH Fuses Type → N 40/50/63/80/100/125/160/200/250/315/355/400 - (Example N40)

CXX → N/A, NXX → N/A

VX: SPD Type

V0 → SPD Class II / V1 → SPD Class I+II / V2 → SPD Class I
 VX → No SPD needed (N/A)

OX: Output type

OX → No Input needed (N/A)
 O1 → WMAC
 O2 → NACE
 O3 → Multivolt CG

Country / Whole World

Floating: YES (F) / NO

P: Portrait

L: Landscape

10: 1000v

15: 1500v

TX: Monitoring Device

TX → No monitoring (N/A)
 T2 → TC 200 (200 or 2.5kV)
 T5 → TC 200kV
 T6 → TC 200kV
 T7 → TC 200kV
 T8 → Others
 T9 → Forcibly
 T10 → Solar SMS (25A)
 T12 → Solar SMS (50A)
 T13 → Solar SMS Lokuliban (25A)
 T14 → Solar SMS Lokuliban (50A)

PX: Power Supply for (TX)

PX → No Power Supply Needed (N/A)
 P0 → Self-Powered (BATT)
 P1 → External Power Supply (PS-ACDC)
 P2 → Self-Powered (BT)

