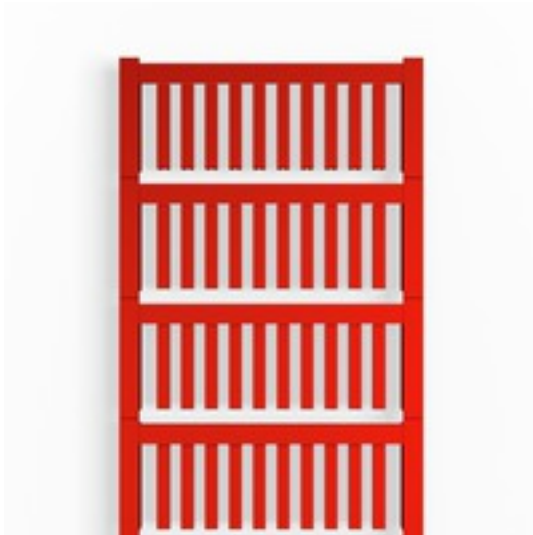


SF 1/21 MC NE RT V2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

General ordering data

Version	SlimFix, Conductor and cable markers, 1.7 - 2.1 mm, 21 x 3.2 mm, red
Order No.	1918600000
Type	SF 1/21 MC NE RT V2
GTIN (EAN)	4032248554454
Qty.	400 pc(s).
compatible printer	2715590000 2438520000 2438510000

SF 1/21 MC NE RT V2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Dimensions and weights**

Depth	3.2 mm	Depth (inches)	0.126 inch
Height	21 mm	Height (inches)	0.827 inch
Width	3.2 mm	Width (inches)	0.126 inch
Net weight	0.295 g		

Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

General data

Colour	red
Halogen	No
Material	Polyamide 66
Number of markers per combination	1 MultiCard = Conductor and cable markers
Number of markers per packaging unit	Form of supply MultiCard
Operating temperature range	-40...100 °C
Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C
Recommended industries	Transportation, Machinery
Size of labelling field	21 x 3.2 mm
Type of printing	neutral
UL 94 flammability rating	V-2
Width	3.2 mm

Conductor and cable markers

Conductor O.D.	1.7 - 2.1 mm	Conductor O.D., max.	2.1 mm
Conductor O.D., min.	1.7 mm	Conductor cross-section, max.	0.75 mm ²
Conductor cross-section, min.	0.5 mm ²	Cross-section for connected wire	0.5 - 0.75 mm ²
Halogen	No		

Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ETIM 8.0	EC001530	ETIM 9.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02
ECLASS 12.0	27-28-11-02	ECLASS 13.0	27-28-11-02
ECLASS 14.0	27-28-11-02		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

SF 1/21 MC NE RT V2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Engineering Data	CAD data – STEP
Product Change Notification	Technical change - DE
	Technical change - EN
	MultiCard Material modification
	MultiCard Material Modifikation
Catalogues	Catalogues in PDF-format

SF 1/21 MC NE RT V2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

