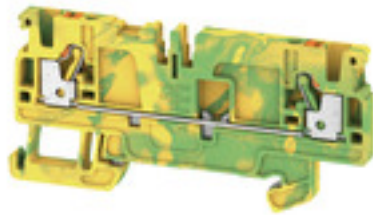


**A2C 2.5 PE/DT/FS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

In some applications it makes sense to add a test point or a disconnect element to the feed through terminal for testing and safety purposes. With test disconnect terminals you measure electric circuits in the absence of voltage. While the disconnecting points clearance and creepage distance is not assessed in dimensional terms, the specified rated impulse voltage strength must be proven.

**General ordering data**

|            |  |
|------------|--|
| Version    | PE terminal, PUSH IN, 2.5 mm <sup>2</sup> , Green/yellow |
| Order No.  | <a href="#">1989890000</a>                               |
| Type       | A2C 2.5 PE/DT/FS   |
| GTIN (EAN) | 4050118374346  |
| Qty.       | 50 pc(s).  |

## A2C 2.5 PE/DT/FS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 36.5 mm    | Depth (inches) | 1.437 inch |
| Depth including DIN rail | 37 mm      | Height         | 77.5 mm    |
| Height (inches)          | 3.051 inch | Width          | 5.1 mm     |
| Width (inches)           | 0.201 inch | Net weight     | 11.258 g   |

## Temperatures

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C         |                                  |        |

## Material data

|                           |       |        |              |
|---------------------------|-------|--------|--------------|
| Material                  | Wemid | Colour | Green/yellow |
| UL 94 flammability rating | V-0   |        |              |

## Rating data IECEx/ATEX

|                                |                     |                                 |                     |
|--------------------------------|---------------------|---------------------------------|---------------------|
| Certificate No. (ATEX)         | TUEV16ATEX7909U     | Certificate No. (IECEX)         | IECEXTUR16.0036U    |
| Max. voltage (ATEX)            | 550 V               | Current (ATEX)                  | 22 A                |
| Wire cross section max. (ATEX) | 2.5 mm <sup>2</sup> | Max. voltage (IECEX)            | 550 V               |
| Current (IECEX)                | 22 A                | Wire cross section max. (IECEX) | 2.5 mm <sup>2</sup> |
| Marking EN 60079-7             | Ex eb II C Gb       | Ex 2014/34/EU label             | II 2 G D            |

## System specifications

|                               |       |                                     |     |
|-------------------------------|-------|-------------------------------------|-----|
| End cover plate required      | Yes   | Number of potentials                | 1   |
| Number of levels              | 1     | Number of clamping points per level | 2   |
| Number of potentials per tier | 1     | PE connection                       | Yes |
| Rail                          | TS 35 | N-function                          | No  |
| PE function                   | Yes   | PEN function                        | No  |

## Additional technical data

|                     |       |                   |         |
|---------------------|-------|-------------------|---------|
| Installation advice | Rail  | Open sides        | right   |
| Snap-on             | No    | Type of fixing    | Snap-on |
| Type of mounting    | TS 35 | With snap-in pegs | No      |

## CSA rating data

|                               |                 |                               |        |
|-------------------------------|-----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-70089609 | Voltage size B (CSA)          | 600 V  |
| Voltage size C (CSA)          | 600 V           | Voltage size D (CSA)          | 600 V  |
| Wire cross section max. (CSA) | 12 AWG          | Wire cross section min. (CSA) | 28 AWG |

## Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

## Conductors for clamping (rated connection)

|  |                      |
|--|----------------------|
| Blade size                               | 0.6 x 3.5 mm         |
| Clamping range, max.                     | 4 mm <sup>2</sup>    |
| Clamping range, min.                     | 0.14 mm <sup>2</sup> |
| Connection cross-section, stranded, max. | 4 mm <sup>2</sup>    |
| Connection cross-section, stranded, min. | 0.5 mm <sup>2</sup>  |

Creation date July 15, 2024 8:40:51 PM CEST

## A2C 2.5 PE/DT/FS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|   |  |         |                      |
|---|--|---------|----------------------|
| Connection direction  | top                                    |         |                      |
| Gauge to IEC 60947-1  | A3                                     |         |                      |
| Number of connections   | 2                                      |         |                      |
| Stripping length  | 10 mm                                  |         |                      |
| Tube length for twin wire-end ferrule   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 8 mm                 |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 0.75 mm <sup>2</sup> |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | max.    | 6 mm                 |
|   |  | min.    | 8 mm                 |
|   | Cross-section for conductor connection | min.    | 0.34 mm <sup>2</sup> |
|   |  | max.    | 0.14 mm <sup>2</sup> |
|   | Tube length                            | max.    | 6 mm                 |
|   |  | min.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 1 mm <sup>2</sup>    |
|   |  | max.    | 0.5 mm <sup>2</sup>  |
|   | Tube length                            | max.    | 8 mm                 |
|   |  | min.    | 12 mm                |
|   | Cross-section for conductor connection | min.    | 2.5 mm <sup>2</sup>  |
|   |  | max.    | 1.5 mm <sup>2</sup>  |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Cross-section for conductor connection | nominal | 0.25 mm <sup>2</sup> |
|   | Tube length                            | nominal | 5 mm                 |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 1 mm <sup>2</sup>    |
|   | Tube length                            | max.    | 10 mm                |
|   |  | min.    | 6 mm                 |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 4 mm <sup>2</sup>    |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 7 mm                 |
| Twin wire-end ferrules, max.  | 0.75 mm <sup>2</sup>                   |         |                      |
| Twin wire-end ferrules, min.  | 0.5 mm <sup>2</sup>                    |         |                      |
| Type of connection  | PUSH IN                                |         |                      |
| Wire connection cross section AWG, max.   | AWG 12                                 |         |                      |
| Wire connection cross section AWG, min.   | AWG 26                                 |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>                      |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm <sup>2</sup>                      |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.   | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup>                    |         |                      |

## A2C 2.5 PE/DT/FS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General

|   |               |   |        |
|---|---------------|---|--------|
| Installation advice                     | Rail          | Rail                                    | TS 35  |
| Standards                               | IEC 60947-7-2 | Wire connection cross section AWG, max. | AWG 12 |
| Wire connection cross section AWG, min. | AWG 26        |   |        |

## Rating data

|  |                     |                                     |               |
|--|---------------------|-------------------------------------|---------------|
| Rated cross-section                          | 2.5 mm <sup>2</sup> | Rated voltage to adjoining terminal | 800 V         |
| Rated DC voltage                             | 800 V               | Standards                           | IEC 60947-7-2 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ             | Rated impulse withstand voltage     | 8 kV          |
| Power loss in accordance with IEC 60947-7-x  | 0.77 W              | Pollution severity                  | 3             |
| Surge voltage category                       | III                 |                                     |               |

## UL rating data

|  |        |  |        |
|--|--------|--|--------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 12 AWG |
| Conductor size Factory wiring min. (cURus) | 28 AWG | Conductor size Field wiring max. (cURus)   | 12 AWG |
| Conductor size Field wiring min. (cURus)   | 28 AWG | Voltage size B (cURus)                     | 600 V  |
| Voltage size C (cURus)                     | 600 V  | Voltage size D (cURus)                     | 600 V  |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000901    | ETIM 7.0    | EC000901    |
| ETIM 8.0    | EC000901    | ETIM 9.0    | EC000901    |
| ECLASS 9.0  | 27-14-11-41 | ECLASS 9.1  | 27-14-11-41 |
| ECLASS 10.0 | 27-14-11-41 | ECLASS 11.0 | 27-14-11-41 |
| ECLASS 12.0 | 27-14-11-41 | ECLASS 13.0 | 27-25-01-03 |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| REACH SVHC             | /                           |
| RoHS Compliance Status | Compliant without exemption |

## Approvals

Approvals



|                           |            |
|---------------------------|------------|
| ROHS                      | Conform    |
| UL File Number Search     | UL Website |
| Certificate No. (cURus)   | E60693     |
| Certificate No. (cURusEX) | E184763    |

**A2C 2.5 PE/DT/FS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a>                    |
|   | <a href="#">Attestation of Conformity</a>                    |
|   | <a href="#">UKCA Ex Attestation of Conformity</a>            |
|   | <a href="#">IECEX Certificate</a>                            |
|   | <a href="#">ATEX Certificate</a>                             |
|   | <a href="#">CB Test Certificate</a>                          |
|   | <a href="#">DNVGL certificate</a>                            |
|   | <a href="#">BV certificate</a>                               |
|   | <a href="#">CB Certificate</a>                               |
|   | <a href="#">CCC Ex Certificate</a>                           |
|   | <a href="#">UKCA Ex Certificate</a>                          |
|   | <a href="#">UKCA declaration of conformity</a>               |
|   | <a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                              |
| Engineering Data                            | <a href="#">Zuken E3.S</a>                                   |
| Tender specification                        | <a href="#">Klippon® Connect 1989890000 DE</a>               |
|   | <a href="#">Klippon® Connect 1989890000 EN</a>               |
| User Documentation                          | <a href="#">NTI_A2C 2.5 DT.pdf</a>                           |
|   | <a href="#">StorageConditionsTerminalBlocks</a>              |
|   | <a href="#">NTI ALO16</a>                                    |
|   | <a href="#">User Manual AXC PE</a>                           |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                     |
| Brochures                                   |  |

### A2C 2.5 PE/DT/FS

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

