

A2T 1.5 KNX RD-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

The Klippon[®] Connect KNX-terminal blocks provide the wiring of the main and reserve leads for KNX Bus wiring systems within a 7 mm combined block width. At each level, a double cross-connection point yields quick and easy distribution of the potential within the terminal.

General ordering data

| | |
|------------|---|
| Version | Multi-tier modular terminal, PUSH IN, white, 1.5 mm ² , 500 V, 500 V, Number of connections: 2, Number of levels: 1, TS 35, V-0, Wemid |
| Order No. | 2652200000 |
| Type | A2T 1.5 KNX RD-BK |
| GTIN (EAN) | 4050118658613 |
| Qty. | 50 pc(s). |

A2T 1.5 KNX RD-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 45 mm | Depth (inches) | 1.772 inch |
| Depth including DIN rail | 34 mm | Height | 84 mm |
| Height (inches) | 3.307 inch | Width | 3.5 mm |
| Width (inches) | 0.138 inch | Net weight | 8.226 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C | | |

Material data

| | | | |
|--------------------------------|--------|---------------------------|-------|
| Material | Wemid | Colour | white |
| Colour of operational elements | orange | UL 94 flammability rating | V-0 |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|---------------------|---------------------------------|---------------------|
| Certificate No. (ATEX) | TUEV16ATEX7909U | Certificate No. (IECEX) | IECEXTUR16.0036U |
| Max. voltage (ATEX) | 440 V | Current (ATEX) | 13.5 A |
| Wire cross section max. (ATEX) | 1.5 mm ² | Max. voltage (IECEX) | 440 V |
| Current (IECEX) | 13.5 A | Wire cross section max. (IECEX) | 1.5 mm ² |

System specifications

| | | | |
|-------------------------------|-----|-------------------------------------|-------|
| End cover plate required | Yes | Number of potentials | 1 |
| Number of levels | 1 | Number of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| PE connection | No | Rail | TS 35 |
| N-function | No | PE function | No |
| PEN function | No | | |

Additional technical data

| | | | |
|--------------------------|---------|---------------------|-------|
| Explosion-tested version | Yes | Installation advice | Rail |
| Open sides | right | Snap-on | No |
| Type of fixing | Snap-on | Type of mounting | TS 35 |
| With snap-in pegs | No | | |

Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

A2T 1.5 KNX RD-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Conductors for clamping (rated connection)**

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 0.4 x 2.0 mm | Clamping range, max. | 1.5 mm ² |
| Clamping range, min. | 0.14 mm ² | Connection cross-section, stranded, max. | 1.5 mm ² |
| Connection cross-section, stranded, min. | 0.5 mm ² | Connection direction | top |
| Gauge to IEC 60947-1 | A1 | Number of connections | 2 |
| Stripping length | 8 mm | Type of connection | PUSH IN |
| Type of connection 2 | PUSH IN | Wire connection cross section AWG, max. | AWG 14 |
| Wire connection cross section AWG, min. | AWG 26 | Wire connection cross section, finely stranded, max. | 1.5 mm ² |
| Wire connection cross section, finely stranded, min. | 0.5 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 1.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm ² | Wire connection cross-section, solid core, max. | 1.5 mm ² |
| Wire connection cross-section, solid core, min. | 0.5 mm ² | | |

General

| | | | |
|---|---------------|---|--------|
| Installation advice | Rail | Rail | TS 35 |
| Standards | IEC 60947-7-1 | Wire connection cross section AWG, max. | AWG 14 |
| Wire connection cross section AWG, min. | AWG 26 | | |

Rating data

| | | | |
|--|---------------------|---------------------------------|---------------|
| Rated cross-section | 1.5 mm ² | Rated voltage | 500 V |
| Rated DC voltage | 500 V | Rated current | 17.5 A |
| Current at maximum wires | 17.5 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.83 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 0.56 W | Pollution severity | 3 |
| Surge voltage category | III | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ECLASS 9.0 | 27-14-11-20 | ECLASS 9.1 | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-02 |
| ECLASS 14.0 | 27-25-01-02 | | |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| REACH SVHC | / |
| RoHS Compliance Status | Compliant without exemption |

A2T 1.5 KNX RD-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



| | |
|---------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURusEX) | E184763 |

Downloads


| | |
|---|--|
| Approval/Certificate/Document of Conformity | Attestation of Conformity UKCA Ex Attestation of Conformity IECEx Certificate ATEX Certificate CCC Ex Certificate UKCA Ex Certificate 20-AV4BO-0270U CE Declaration of Conformity UKCA declaration of conformity Confirmation of Standards EN 45545-2_2020-10 |
| Engineering Data | CAD data – STEP |
| Tender specification | Ausschreibungstext A2T 1.5 KNX RD-BK |
| User Documentation | StorageConditionsTerminalBlocks NTI A2t 1.5 User Manual AXC 1.5-16 |
| Catalogues | Catalogues in PDF-format |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

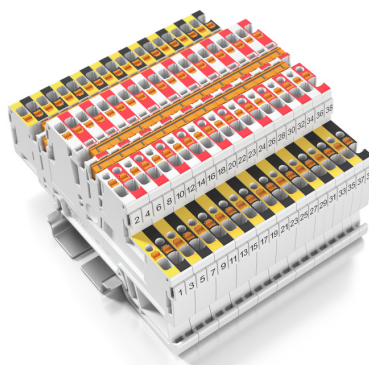

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

DEK 5/3.5



WS/ DEK


MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/3.5 MM WS | Version |
| Order No. | 2007100000 | Dekafix, Terminal marker, 5 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391992 | |
| Qty. | 1,000 pc(s). | |

1.5 mm²

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| | | |
|------------|----------------------------|---------------------|
| Type | AEP 2T 1.5 | Version |
| Order No. | 2469420000 | A-series, End plate |
| GTIN (EAN) | 4050118562255 | |
| Qty. | 20 pc(s). | |
| Type | AEP 2T 1.5 BL | Version |
| Order No. | 2471470000 | A-series, End plate |
| GTIN (EAN) | 4050118562293 | |
| Qty. | 20 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

A-Series



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | AAM 1.5 YE FLASH | Version |
| Order No. | 2635520000 | Terminal marker, 6.2 x 3.5 mm, Pitch in mm (P): 3.50 yellow |
| GTIN (EAN) | 4050118674088 | |
| Qty. | 40 pc(s). | |

A-Series



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

General ordering data

| | | |
|------------|----------------------------|---------------------------|
| Type | APP 4 | Version |
| Order No. | 2489110000 | A-series, Partition plate |
| GTIN (EAN) | 4050118499322 | |
| Qty. | 50 pc(s). | |

A2T 1.5 KNX RD-BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Digital multimeters**

Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard.

In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | ZUB MULTIMETER | Version |
| Order No. | 9205270000 | Multimeter |
| GTIN (EAN) | 4032248723522 | |
| Qty. | 1 pc(s). | |

A-Series

Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | ATPG 1.5 MI-R | Version |
| Order No. | 1991880000 | Test adapter (terminal), 1.5 mm², 250 V, 0.2 A |
| GTIN (EAN) | 4050118376715 | |
| Qty. | 50 pc(s). | |
| Type | ATPG 1.5-10 L | Version |
| Order No. | 1991890000 | Test adapter (terminal), 1.5 mm², 250 V, 0.2 A |
| GTIN (EAN) | 4050118376647 | |
| Qty. | 50 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

General ordering data

| | | |
|------------|----------------------------|--|
| Type | SDS 0.4X2.0X60 | Version |
| Order No. | 2749260000 | Screwdriver, Blade width (B): 2 mm, Blade length: 60 mm, Blade thickness (A): 0.4 mm |
| GTIN (EAN) | 4050118895537 | |
| Qty. | 1 pc(s). | |

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/3.5 MC SDR | Version |
| Order No. | 1767730000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248102532 | Weidmueller, To customer specification |
| Qty. | 100 pc(s). | |

| | | |
|------------|----------------------------|---|
| Type | DEK 5/3.5 PLUS MC SDR | Version |
| Order No. | 2007790000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118393347 | Weidmueller, To customer specification |
| Qty. | 320 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

WS 8/3.5



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.


Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 8/3.5 MM WS | Version |
| Order No. | 2007140000 | WS, Terminal marker, 8 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391893 | |
| Qty. | 1,000 pc(s). | |

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 10/3.5 PLUS MC NE WS | Version |
| Order No. | 2003760000 | WS, Terminal marker, 10 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118424454 | Weidmueller, white |
| Qty. | 960 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/3.5 MC NE WS | Version |
| Order No. | 1755270000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248017348 | Weidmueller, white |
| Qty. | 500 pc(s). | |
| Type | DEK 5/3.5 MC NE GE | Version |
| Order No. | 1369480000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118171860 | Weidmueller, yellow |
| Qty. | 500 pc(s). | |
| Type | DEK 5/3.5 PLUS MC NE WS | Version |
| Order No. | 2003750000 | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118424430 | Weidmueller, white |
| Qty. | 1,600 pc(s). | |

SnapMark



SnapMark - this tag carrier has been developed specifically for the I-series double-level terminal IDK 1.5N. The flexible pivot mechanism allows cross-connections to be easily installed or removed. It can hold four DEK 5 labelling tags or two WS 10/5 Middle connector markers.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | SNAPMARK I | Version |
| Order No. | 1805880000 | Group markers, Terminal marker, 23 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4032248273614 | Weidmueller, white |
| Qty. | 50 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

1.5 mm²


1.5
mm²

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | ZQV 1.5N/3 RD | Version |
| Order No. | 1985670000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 3, |
| GTIN (EAN) | 4050118370348 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/7 BL | Version |
| Order No. | 1985630000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 7, |
| GTIN (EAN) | 4050118370522 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/4 BL | Version |
| Order No. | 1985570000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 4, |
| GTIN (EAN) | 4050118370317 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/8 BL | Version |
| Order No. | 1985640000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 8, |
| GTIN (EAN) | 4050118370461 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/5 BL | Version |
| Order No. | 1985590000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 5, |
| GTIN (EAN) | 4050118370430 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/9 BL | Version |
| Order No. | 1985660000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 9, |
| GTIN (EAN) | 4050118370478 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/5 | Version |
| Order No. | 1985500000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118369991 | 5, Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/6 | Version |
| Order No. | 1985510000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370188 | 6, Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/20 RD | Version |
| Order No. | 1985810000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 20, |
| GTIN (EAN) | 4050118370355 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/50 BL | Version |
| Order No. | 1985720000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370546 | 50, Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm |
| Qty. | 5 pc(s). | |

Creation date August 28, 2024 6:53:32 AM CEST

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|--|
| Type | ZQV 1.5N/10 BL | Version |
| Order No. | 1985680000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370539 | 10, Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/7 | Version |
| Order No. | 1985520000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370195 | 7, Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/3 | Version |
| Order No. | 1985480000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370096 | 3, Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/4 RD | Version |
| Order No. | 1985690000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 4, |
| GTIN (EAN) | 4050118370515 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/50 RD | Version |
| Order No. | 1985820000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 50, |
| GTIN (EAN) | 4050118370270 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm |
| Qty. | 5 pc(s). | |
| Type | ZQV 1.5N/8 | Version |
| Order No. | 1985540000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370218 | 8, Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/9 RD | Version |
| Order No. | 1985790000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 9, |
| GTIN (EAN) | 4050118370386 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 | Version |
| Order No. | 1985410000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118369861 | 2, Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/4 | Version |
| Order No. | 1985490000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370201 | 4, Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/7 RD | Version |
| Order No. | 1985750000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 7, |
| GTIN (EAN) | 4050118370249 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/8 RD | Version |
| Order No. | 1985770000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 8, |
| GTIN (EAN) | 4050118370508 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/10 | Version |
| Order No. | 1985580000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370416 | 10, Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/10 RD | Version |
| Order No. | 1985800000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 10, |
| GTIN (EAN) | 4050118370393 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm |
| Qty. | 20 pc(s). | |

Creation date August 28, 2024 6:53:32 AM CEST

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|--|
| Type | ZQV 1.5N/20 BL | Version |
| Order No. | 1985700000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370331 | 20, Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/9 | Version |
| Order No. | 1985560000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370409 | 9, Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 BL | Version |
| Order No. | 1985530000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 2, |
| GTIN (EAN) | 4050118370423 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/6 RD | Version |
| Order No. | 1985730000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 6, |
| GTIN (EAN) | 4050118370454 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/5 RD | Version |
| Order No. | 1985710000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 5, |
| GTIN (EAN) | 4050118370256 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/20 | Version |
| Order No. | 1985600000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370225 | 20, Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm |
| Qty. | 20 pc(s). | |
| Type | ZQV 1.5N/2 RD | Version |
| Order No. | 1985650000 | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 2, |
| GTIN (EAN) | 4050118370324 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/3 BL | Version |
| Order No. | 1985550000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 3, |
| GTIN (EAN) | 4050118370485 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm |
| Qty. | 60 pc(s). | |
| Type | ZQV 1.5N/50 | Version |
| Order No. | 1985620000 | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370300 | 50, Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm |
| Qty. | 5 pc(s). | |
| Type | ZQV 1.5N/6 BL | Version |
| Order No. | 1985610000 | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 6, |
| GTIN (EAN) | 4050118370492 | Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm |
| Qty. | 20 pc(s). | |

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 10/3.5 PLUS MC SDR | Version |
| Order No. | 2007760000 | WS, Terminal marker, 10 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4050118393262 | Weidmueller, To customer specification |
| Qty. | 192 pc(s). | |

A-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 | Version |
| Order No. | 1991920000 | A-series, End bracket |
| GTIN (EAN) | 4050118376722 | |
| Qty. | 50 pc(s). | |
| Type | AEB 35 SCL/1 VO GY | Version |
| Order No. | 2661290000 | A-series, End bracket |
| GTIN (EAN) | 4050118702170 | |
| Qty. | 20 pc(s). | |
| Type | AEB 35 SCL/1 VO | Version |
| Order No. | 2661280000 | A-series, End bracket |
| GTIN (EAN) | 4050118702163 | |
| Qty. | 20 pc(s). | |
| Type | AEB 35 SC/1 BK | Version |
| Order No. | 2475310000 | A-series, End bracket |
| GTIN (EAN) | 4050118487114 | |
| Qty. | 50 pc(s). | |

Creation date August 28, 2024 6:53:32 AM CEST

A2T 1.5 KNX RD-BK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SCL/1 V0 BK | Version |
| Order No. | 2661300000 | A-series, End bracket |
| GTIN (EAN) | 4050118702187 | |
| Qty. | 20 pc(s). | |